

REV	ECN NO.	DESCRIPTION	DATE	DESIGN
A/2		完善图纸	21/11/17	SU LIAN
A/3		增加*尺寸为首件重点检验尺寸	21/12/09	SU LIAN






Specifications:
Current rating:1A AC/DC.
Voltage rating:50V AC/DC
Temperature range:−25°C~+85°C.
Contact resistance:20mΩ Max.
Insulation resistance:100MΩ Min.
Withstanding voltage:500V AC/minute.
Material:Nylon66 UL94V−0.CM3004V0.
Color: Natural.


PART NO.	Dimensions	
	A	B
A1258H−02P	1.25	3.60
A1258H−03P	2.50	4.85
A1258H−04P	3.75	6.10
A1258H−05P	5.00	7.35
A1258H−06P	6.25	8.60
A1258H−07P	7.50	9.85
A1258H−08P	8.75	11.10
A1258H−09P	10.00	12.35
A1258H−10P	11.25	13.60
A1258H−11P	12.50	14.85
A1258H−12P	13.75	16.10
A1258H−13P	15.00	17.35
A1258H−14P	16.25	18.60
A1258H−15P	18.50	19.85

CNJM Joint More Precision electronics Co.,Ltd.


DRAW NO.		DATE	P/N NO:	DRAW NAME:	
DESIGN:	陈雪峰	2018.03.29	A1258H−NP	1.25mm pitch Housing	
CHECK:	杨 烨				
REVIEW:			REV.A/3	SCALE 1:1	UNIT: mm
				SHEET: 1 OF 1	⊕ ◁

DIM	TOL	DIM	TOL
X.	/	X*.	/
X.X	0.35	X.X*	
X.XX	0.25	X.XX*	
X.XXX	0.15	X.XXX*	/

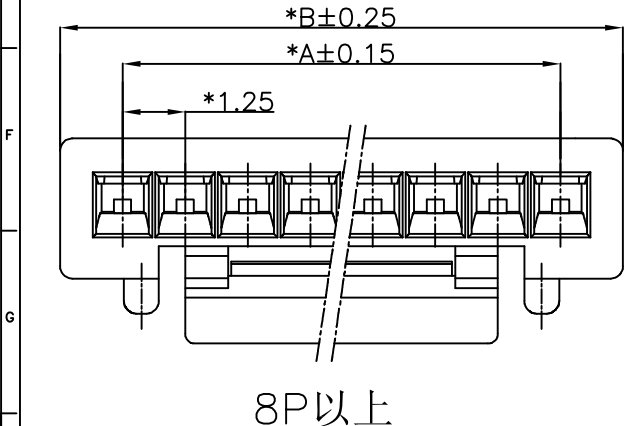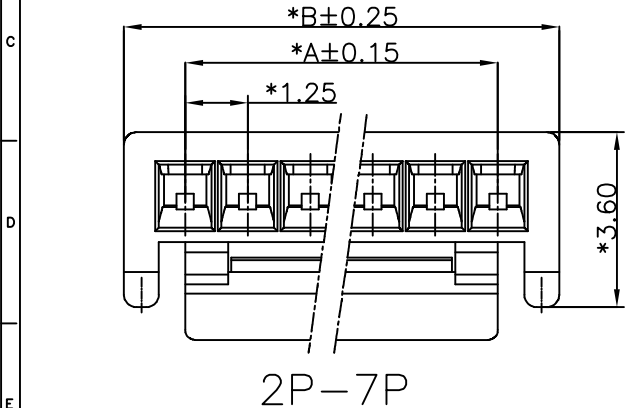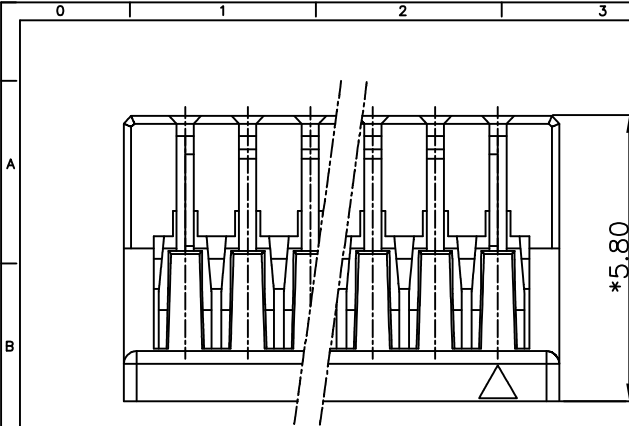

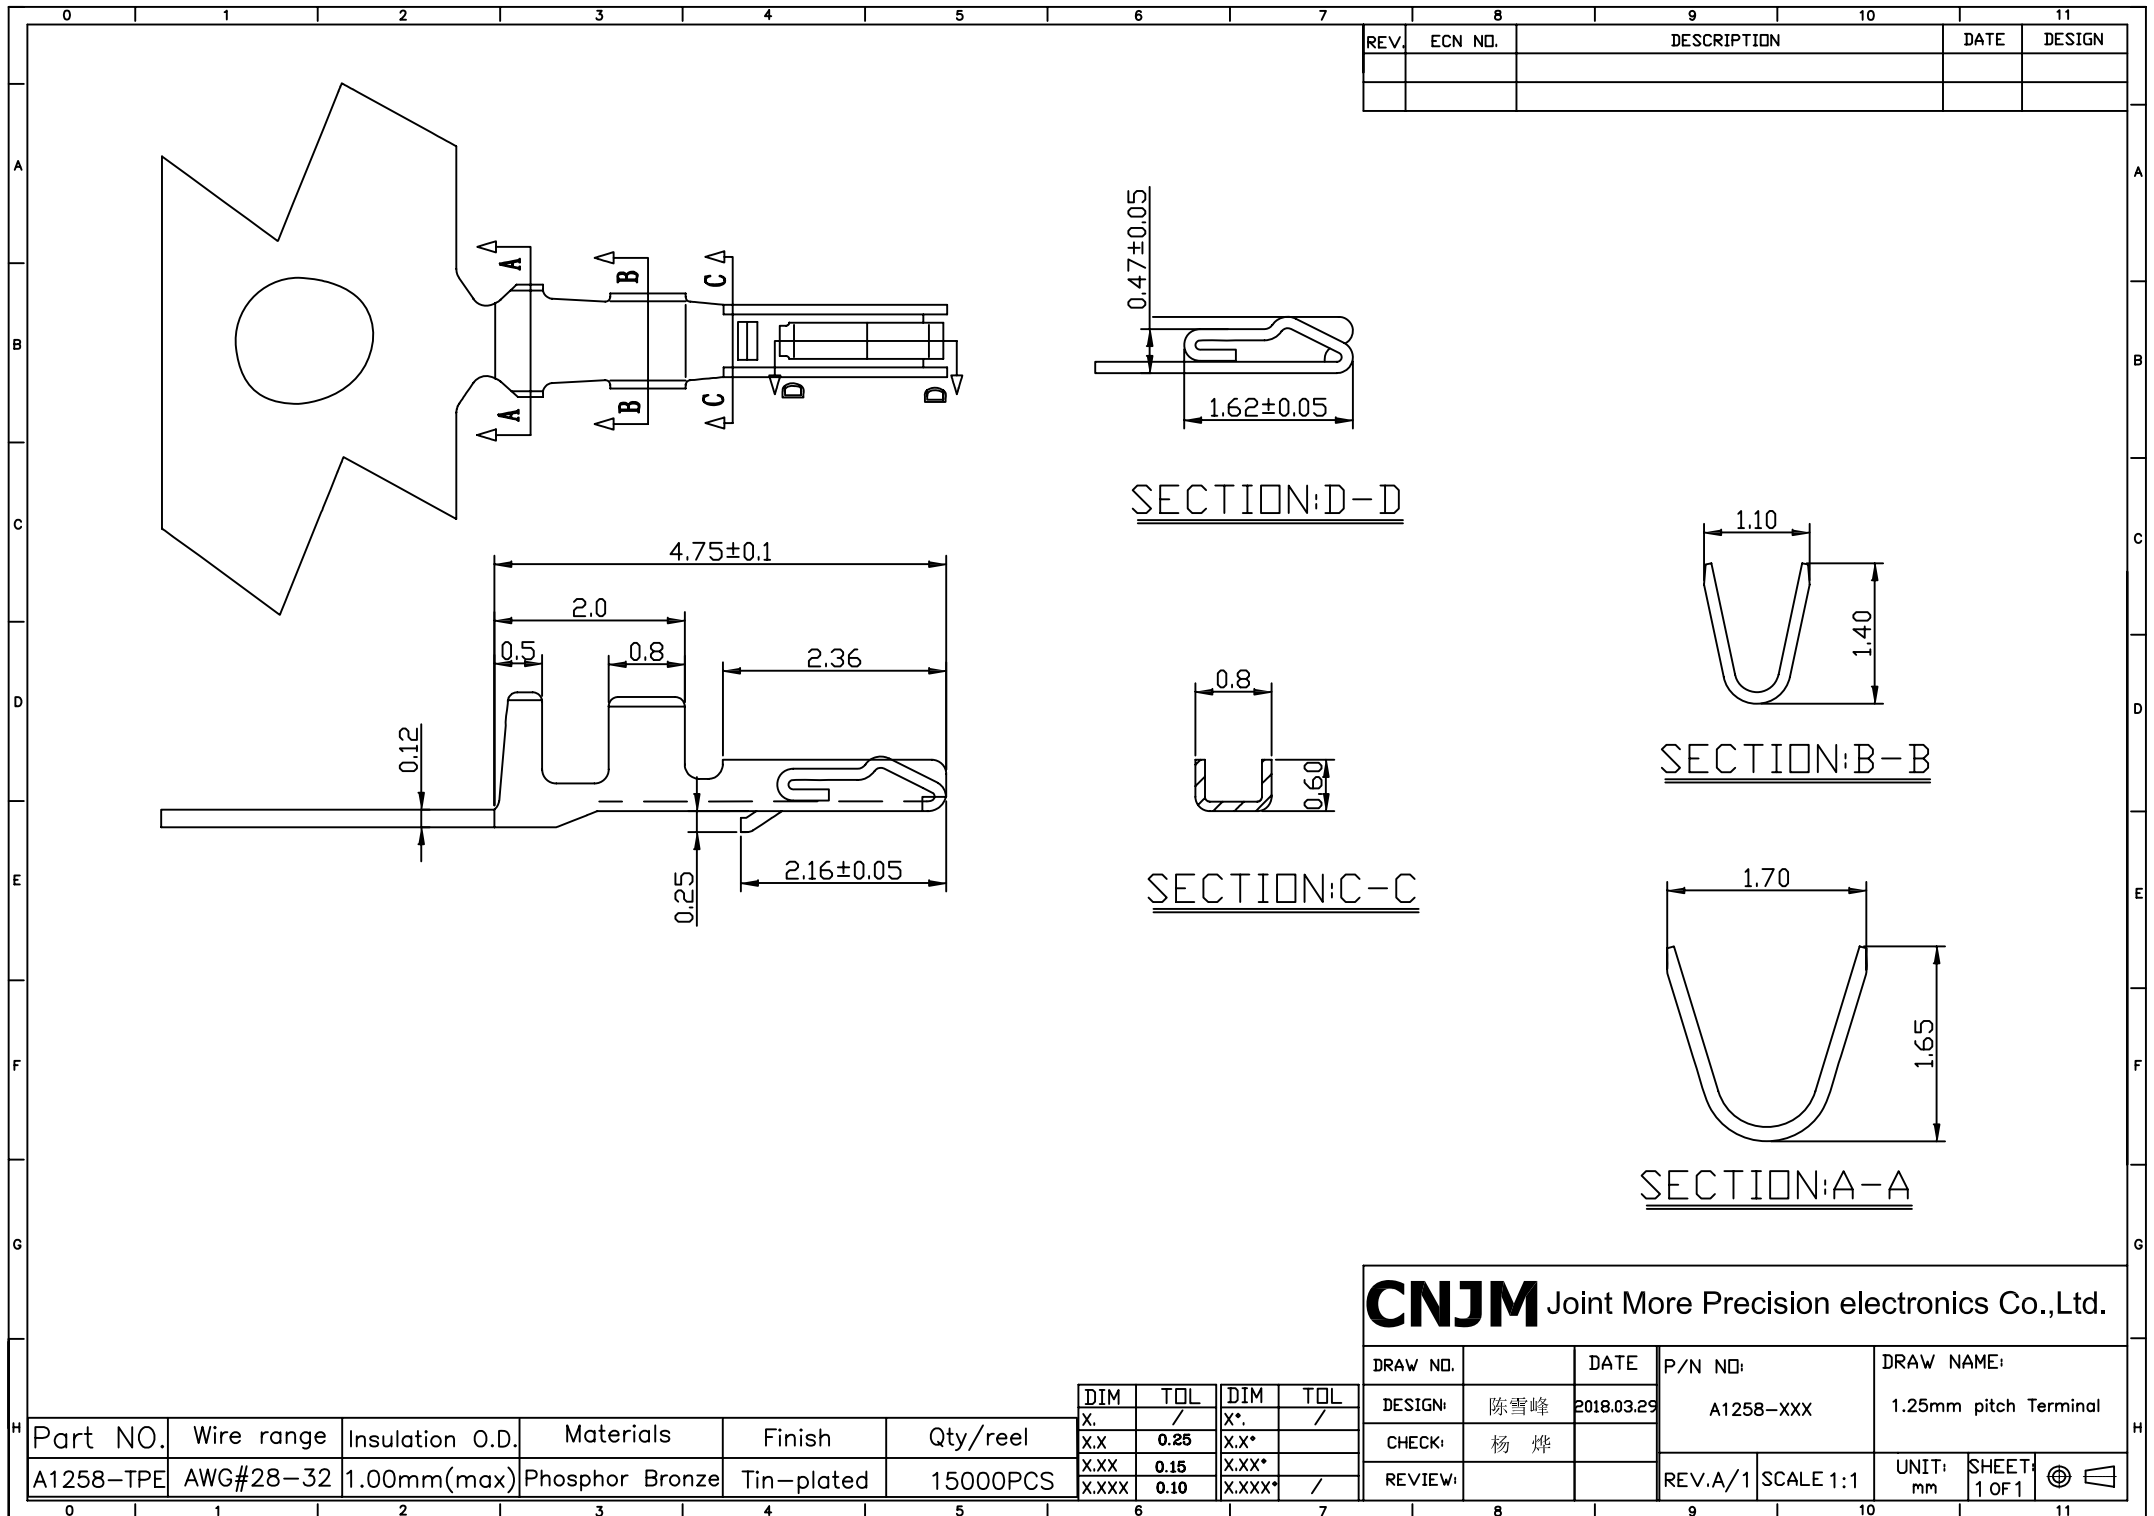


REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
A/2			18/03/29	王赴春

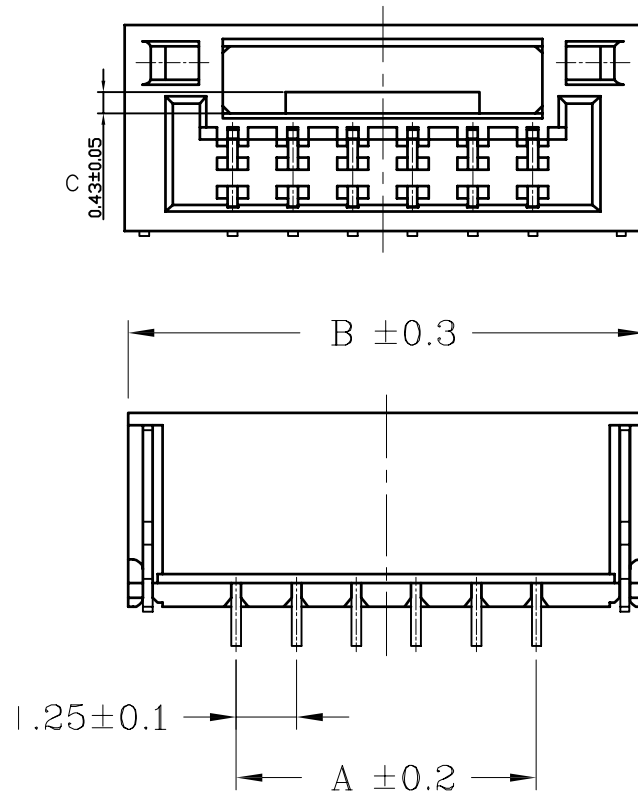

Specifications:
 Current rating: 1A AC/DC.
 Voltage rating: 50V AC/DC
 Temperature range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$.
 Contact resistance: $30\text{m}\Omega$ Max.
 Insulation resistance: $1000\text{M}\Omega$ Min.
 Withstanding voltage: 500V AC/minute.
 Material: PA9T, UL94V-0.

PART NO.	Dimensions	
	A	B
A1258WR-S-02P	1.25	5.75
A1258WR-S-03P	2.50	7.00
A1258WR-S-04P	3.75	8.25
A1258WR-S-05P	5.00	9.50
A1258WR-S-06P	6.25	10.75
A1258WR-S-07P	7.50	12.00
A1258WR-S-08P	8.75	13.25
A1258WR-S-09P	10.00	14.50
A1258WR-S-10P	11.25	15.75
A1258WR-S-11P	12.50	17.00
A1258WR-S-12P	13.75	18.25
A1258WR-S-13P	15.00	19.50
A1258WR-S-14P	16.25	20.75
A1258WR-S-15P	17.50	22.00

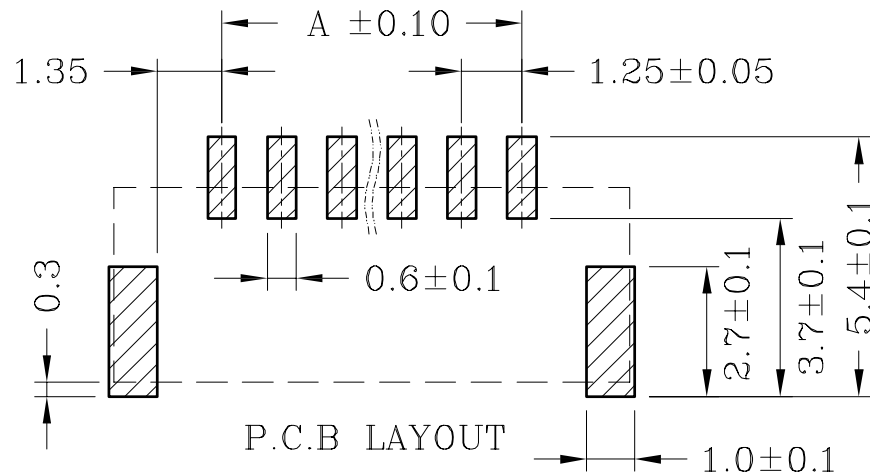


CNJM Joint More Precision electronics Co., Ltd.

DRAW NO.	DATE	P/N NO.	DRAW NAME:
DESIGN: 陈雪峰	2018.03.29	A1258WR-S-NP	1.25mm pitch 90° wafer
CHECK: 杨 焯			
REVIEW:		REV: A/2	SCALE 1:1
		UNIT: mm	SHEET: 1 OF 1


DIM	TOL	DIM	TOL
X	/	X*	/
X.X	0.25	X.X*	
X.XX	0.15	X.XX*	
X.XXX	0.10	X.XXX*	/

REV	ECN NO.	DESCRIPTION	DATE	DESIGN
A/2		模具完善	21-11-17	SU LIAN


12PIN及以上示意图

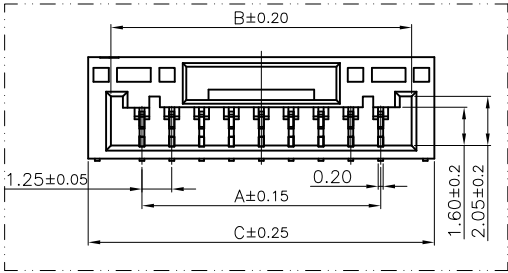






7-11PIN以下示意图

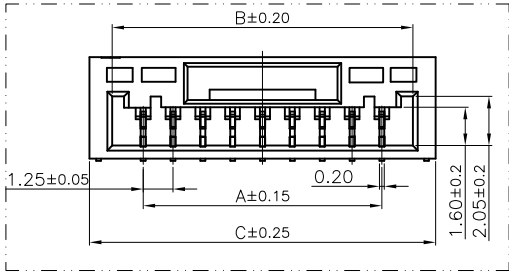


6PIN及以下示意图

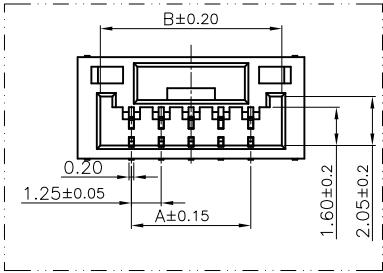


Specifications:
Current rating:1A AC/DC.
Voltage rating:50V AC/DC
Temperature range:-25C~+85°C.
Contact resistance:20mΩ Max.
Insulation resistance:100MΩ Min.
Withstanding voltage: 500V AC/minute.
Material: PA9T/LCP.UL94V-0.
PIN: Phosphor Bronze.
Solder Tabs: Brass.

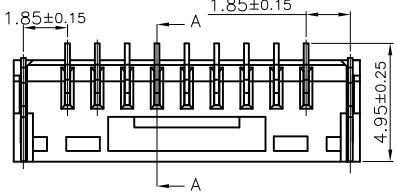

SECTION A-A
SCALE 1:1

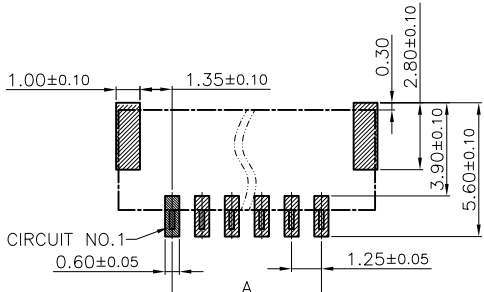

RECOMMENDED PCB. LAYOUT
DEFAULT TOLERANCE:±0.10(TOP VIEW)

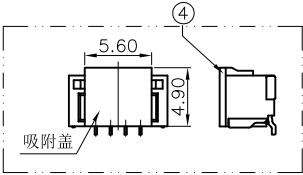

产品装上吸盖示意图
SCALE 1:2

PART NO.	Dimensions		
	A	B	C
A1258WV-S-02P	1.25	3.85	5.75
A1258WV-S-03P	2.50	5.10	7.00
A1258WV-S-04P	3.75	6.38	8.25
A1258WV-S-05P	5.00	7.60	9.50
A1258WV-S-06P	6.25	8.85	10.75
A1258WV-S-07P	7.50	10.10	12.00
A1258WV-S-08P	8.75	11.35	13.25
A1258WV-S-09P	10.00	12.60	14.50
A1258WV-S-10P	11.25	13.85	15.75
A1258WV-S-11P	12.50	15.10	17.00
A1258WV-S-12P	13.75	16.35	18.25
A1258WV-S-13P	15.00	17.60	19.50
A1258WV-S-14P	16.25	18.85	20.75
A1258WV-S-15P	17.50	20.10	22.00

CNJM Joint More Precision electronics Co.,Ltd.

DRAW NO.	DATE	P/N NO.	DRAW NAME:
DESIGN: 陈雪峰	2018.03.29	A1258WV-S-NP	1.25mm pitch 180° wafer
CHECK: 杨 烨			
REVIEW:		REV.A/2 SCALE 1:1	UNIT: mm SHEET: 1 OF 1

DIM	TOL	DIM	TOL
X.	/	X*.	/
X.X	0.35	X.X*	
X.XX	0.25	X.XX*	
X.XXX	0.15	X.XXX*	/