
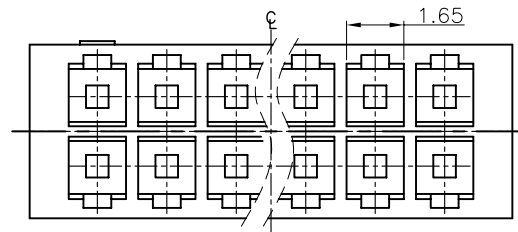
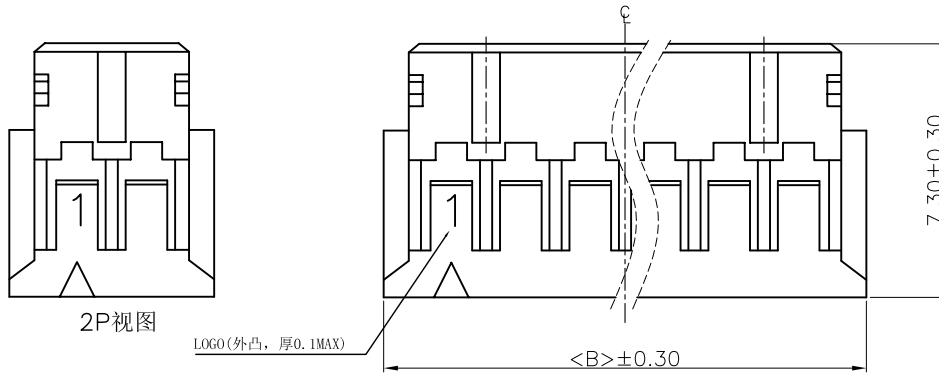

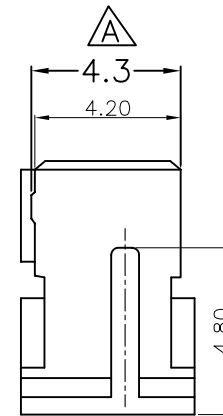


REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
A		变更料号	16/11/22	苏亮
A1		变更尺寸 Δ	19/07/07	苏亮

NOTES:

CURRENT RATING:3A AC/DC.
VOLTAGE RATING:250V AC/DC
TEMPERATURE RANGE:-40°C~+105°C.
CONTACT RESISTANCE:10M Ω Max.
INSULAION RESSTANCE:1000M Ω Min.
WITHSTANDING VOLTAGE: 800V AC/MINUTE.
WATRLAL:PA66.UL94V-0.


PART NO.	Dimensions	
	A	B
A2006H-2X02P	2.00	6.00
A2006H-2X03P	4.00	8.00
A2006H-2X04P	6.00	10.00
A2006H-2X05P	8.00	12.00
A2006H-2X06P	10.00	14.00
A2006H-2X07P	12.00	16.00
A2006H-2X08P	14.00	18.00
A2006H-2X09P	16.00	20.00
A2006H-2X10P	18.00	22.00
A2006H-2X11P	20.00	24.00
A2006H-2X12P	22.00	26.00
A2006H-2X13P	24.00	28.00
A2006H-2X14P	26.00	30.00
A2006H-2X15P	28.00	32.00
A2006H-2X16P	30.00	34.00
A2006H-2X17P	32.00	36.00
A2006H-2X18P	34.00	38.00
A2006H-2X19P	36.00	40.00
A2006H-2X20P	38.00	42.00

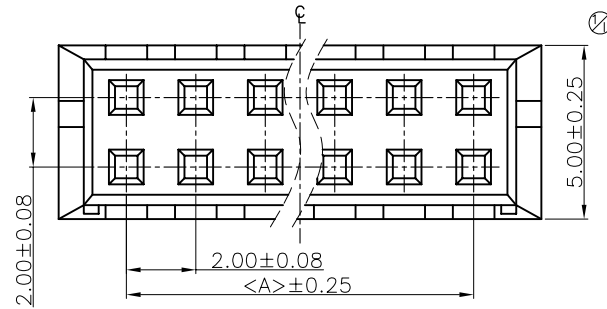

CNJM Joint More Precision electronics Co.,Ltd.

DRAW NO.	DATE	P/N NO:	DRAW NAME:
DESIGN: 陈雪峰	2017.06.03	A2006H-2XNP	2.0mm pitch housing
CHECK: 杨 烨			
REVIEW:		REV. A/1	SCALE 1:1
UNIT: mm	SHEET: 1 OF 1		

DIM	TOL	DIM	TOL
X.	/	X'.	/
X.X	0.25	X.X'	/
X.XX	0.15	X.XX'	/
X.XXX	0.10	X.XXX'	/

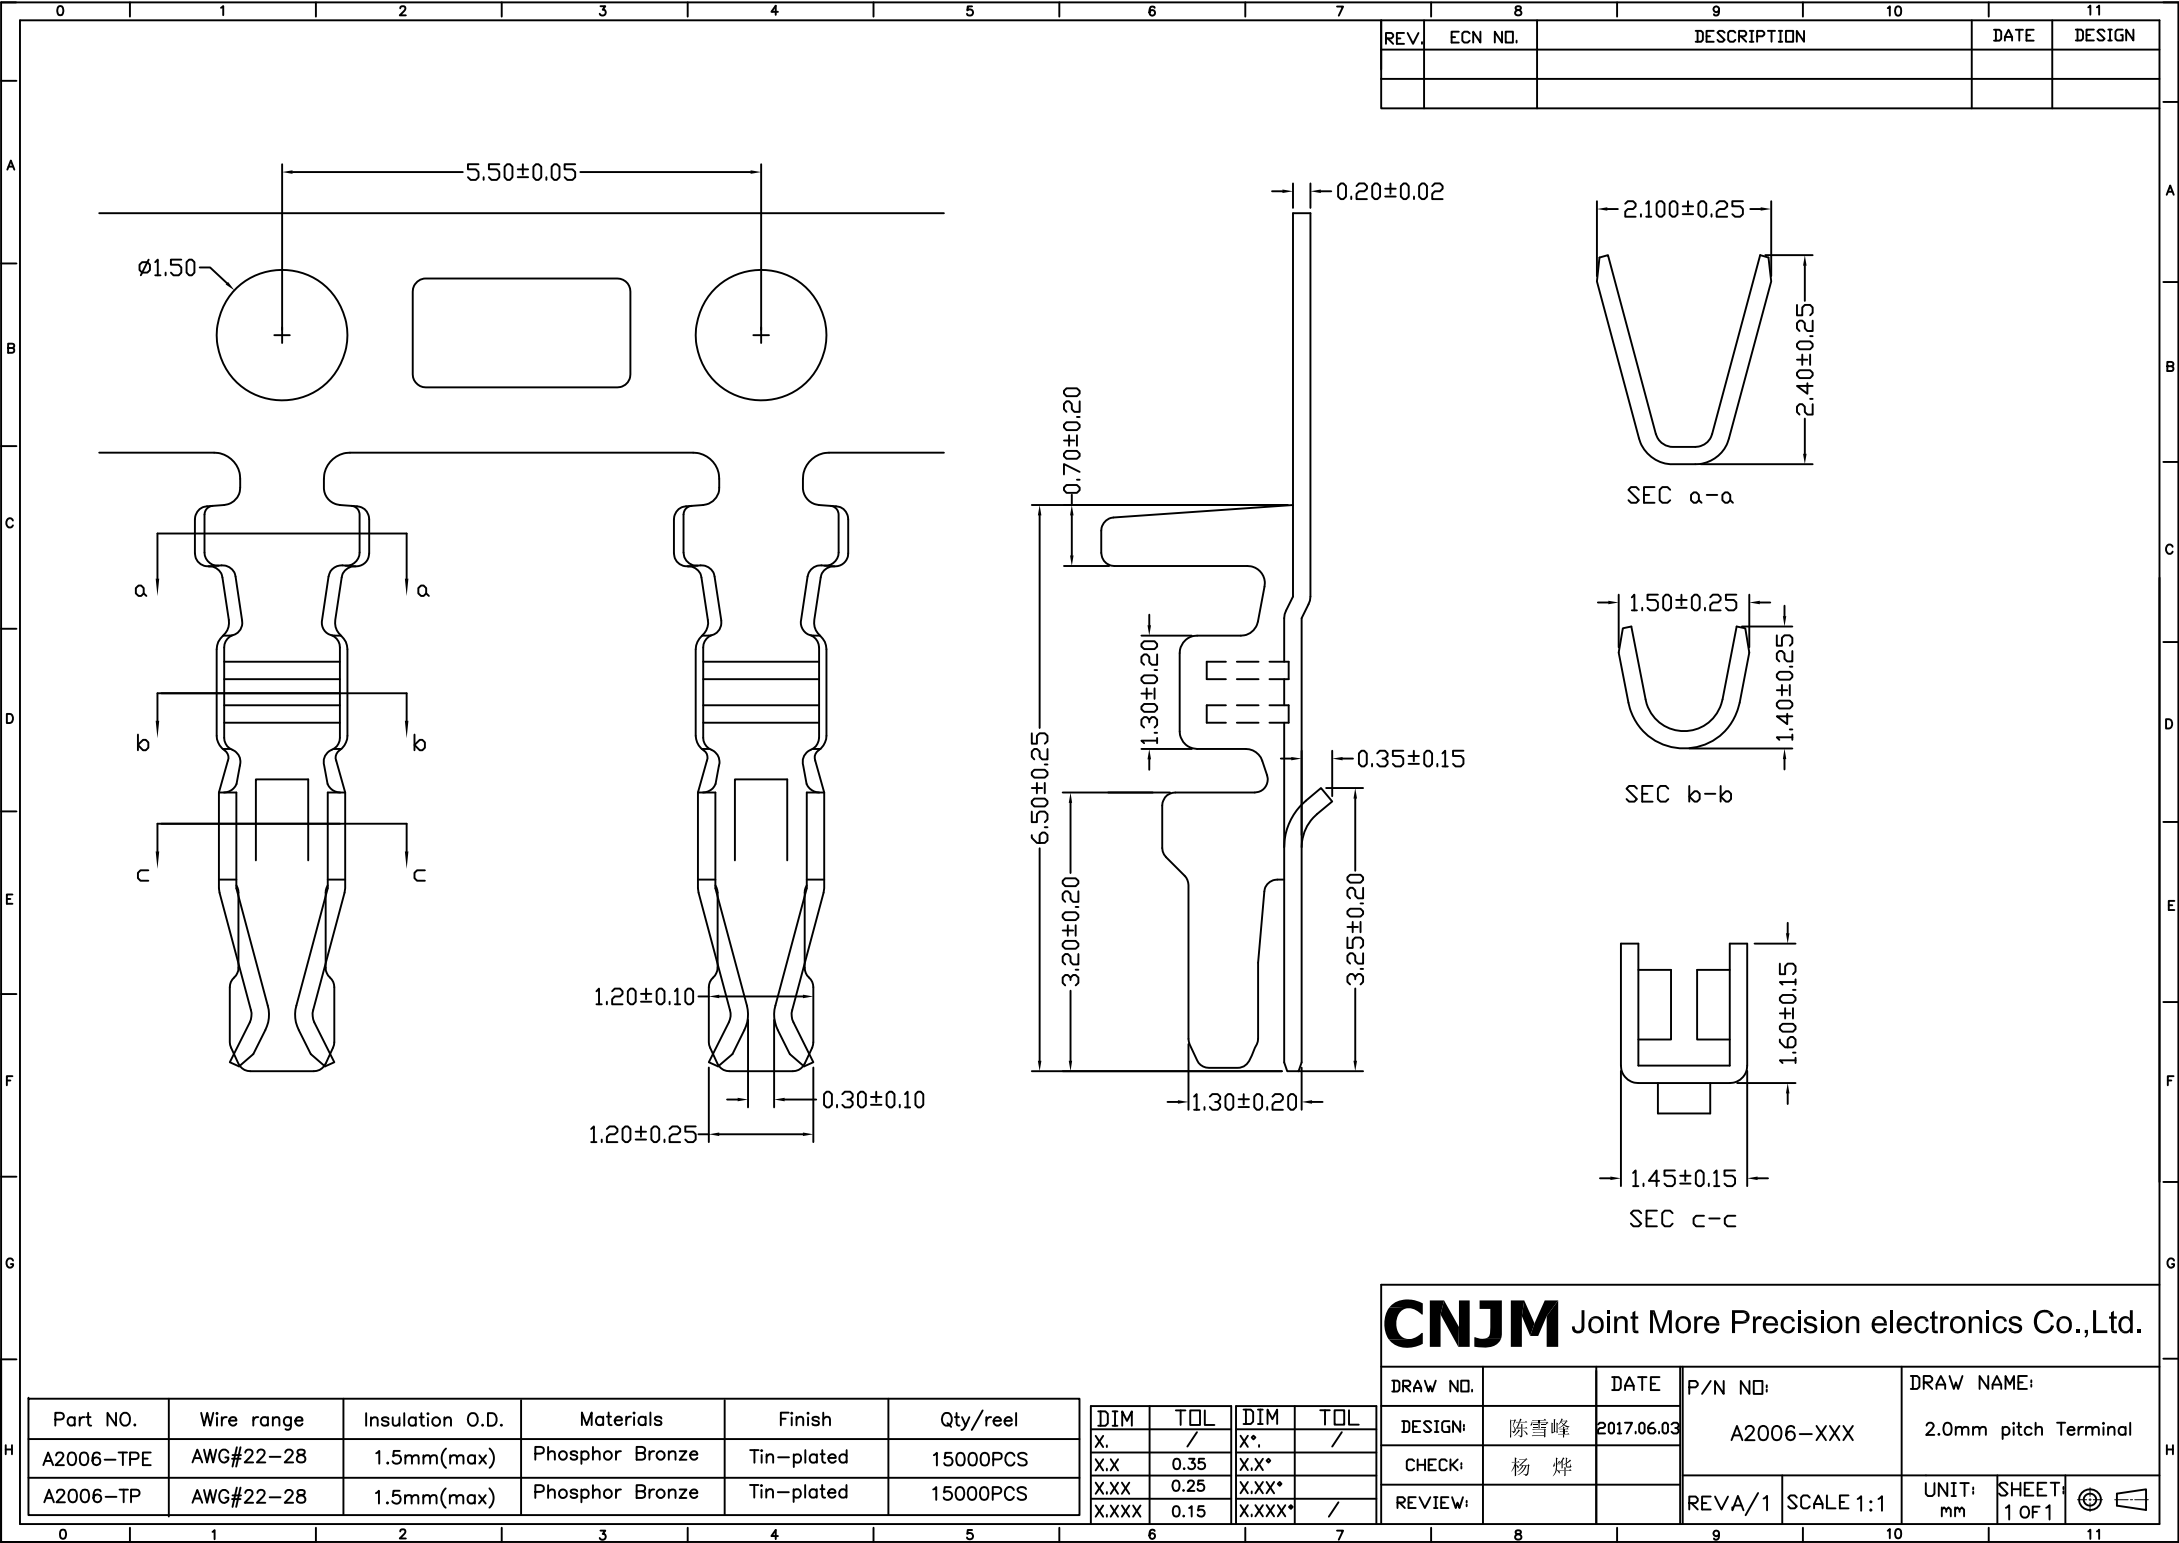


REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

Part NO.	Wire range	Insulation O.D.	Materials	Finish	Qty/reel
A2006-TPE	AWG#22-28	1.5mm(max)	Phosphor Bronze	Tin-plated	15000PCS
A2006-TP	AWG#22-28	1.5mm(max)	Phosphor Bronze	Tin-plated	15000PCS

DIM	TOL	DIM	TOL
X.	/	X*.	/
X.X	0.35	X.X*	
X.XX	0.25	X.XX*	
X.XXX	0.15	X.XXX*	/

CNJM Joint More Precision electronics Co.,Ltd.					
DRAW NO.		DATE	P/N NO:	DRAW NAME:	
DESIGN:	陈雪峰	2017.06.03	A2006-XXX	2.0mm pitch Terminal	
CHECK:	杨 烨				
REVIEW:			REVA/1	SCALE 1:1	UNIT: mm
					SHEET 1 OF 1
					⊗

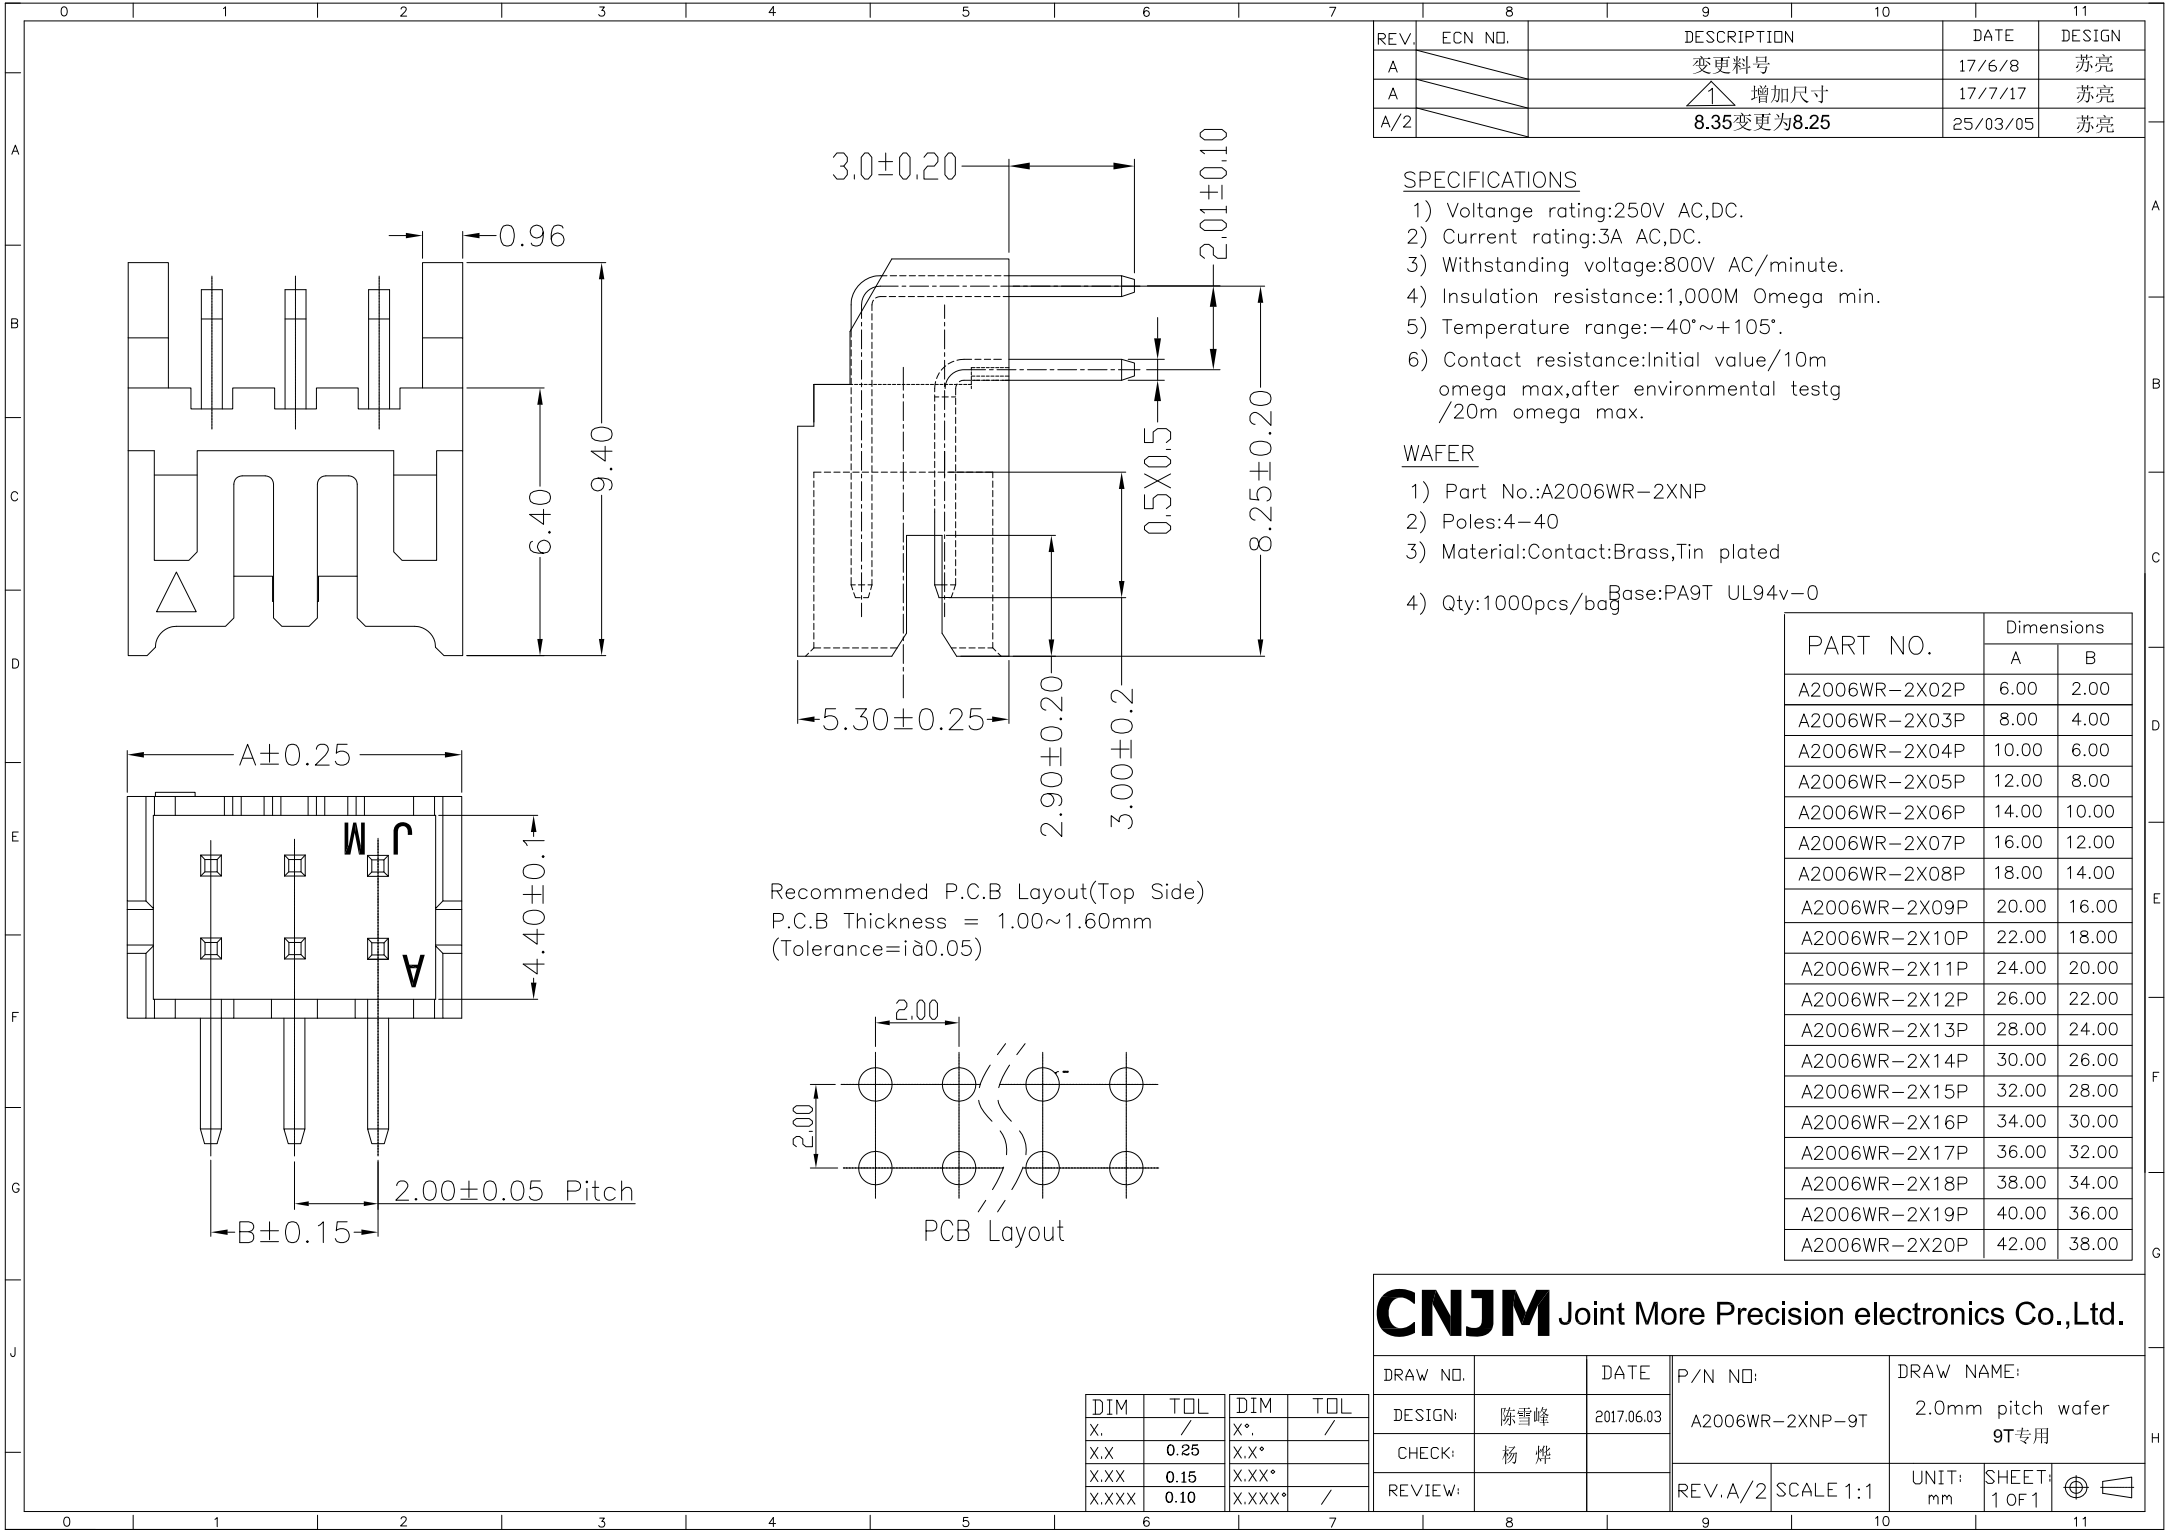

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
A		变更料号	17/6/8	苏亮
A		增加尺寸	17/7/17	苏亮
A/2		8.35变更为8.25	25/03/05	苏亮

SPECIFICATIONS

- 1) Voltange rating:250V AC,DC.
- 2) Current rating:3A AC,DC.
- 3) Withstanding voltage:800V AC/minute.
- 4) Insulation resistance:1,000M Omega min.
- 5) Temperature range:-40°~+105°.
- 6) Contact resistance:Initial value/10m omega max,after environmental testg /20m omega max.

WAFER


- 1) Part No.:A2006WR-2XNP
- 2) Poles:4-40
- 3) Material:Contact:Brass,Tin plated
- 4) Qty:1000pcs/bagBase:PA9T UL94v-0

PART NO.	Dimensions	
	A	B
A2006WR-2X02P	6.00	2.00
A2006WR-2X03P	8.00	4.00
A2006WR-2X04P	10.00	6.00
A2006WR-2X05P	12.00	8.00
A2006WR-2X06P	14.00	10.00
A2006WR-2X07P	16.00	12.00
A2006WR-2X08P	18.00	14.00
A2006WR-2X09P	20.00	16.00
A2006WR-2X10P	22.00	18.00
A2006WR-2X11P	24.00	20.00
A2006WR-2X12P	26.00	22.00
A2006WR-2X13P	28.00	24.00
A2006WR-2X14P	30.00	26.00
A2006WR-2X15P	32.00	28.00
A2006WR-2X16P	34.00	30.00
A2006WR-2X17P	36.00	32.00
A2006WR-2X18P	38.00	34.00
A2006WR-2X19P	40.00	36.00
A2006WR-2X20P	42.00	38.00

CNJM Joint More Precision electronics Co.,Ltd.

DRAW NO.	DATE	P/N NO:	DRAW NAME:
DESIGN:	陈雪峰	2017.06.03	A2006WR-2XNP-9T
CHECK:	杨 烨		2.0mm pitch wafer
REVIEW:			9T专用
REV. A/2	SCALE 1:1	UNIT: mm	SHEET: 1 OF 1

DIM	TOL	DIM	TOL
X.	/	X°	/
X.X	0.25	X.X°	
X.XX	0.15	X.XX°	
X.XXX	0.10	X.XXX°	/

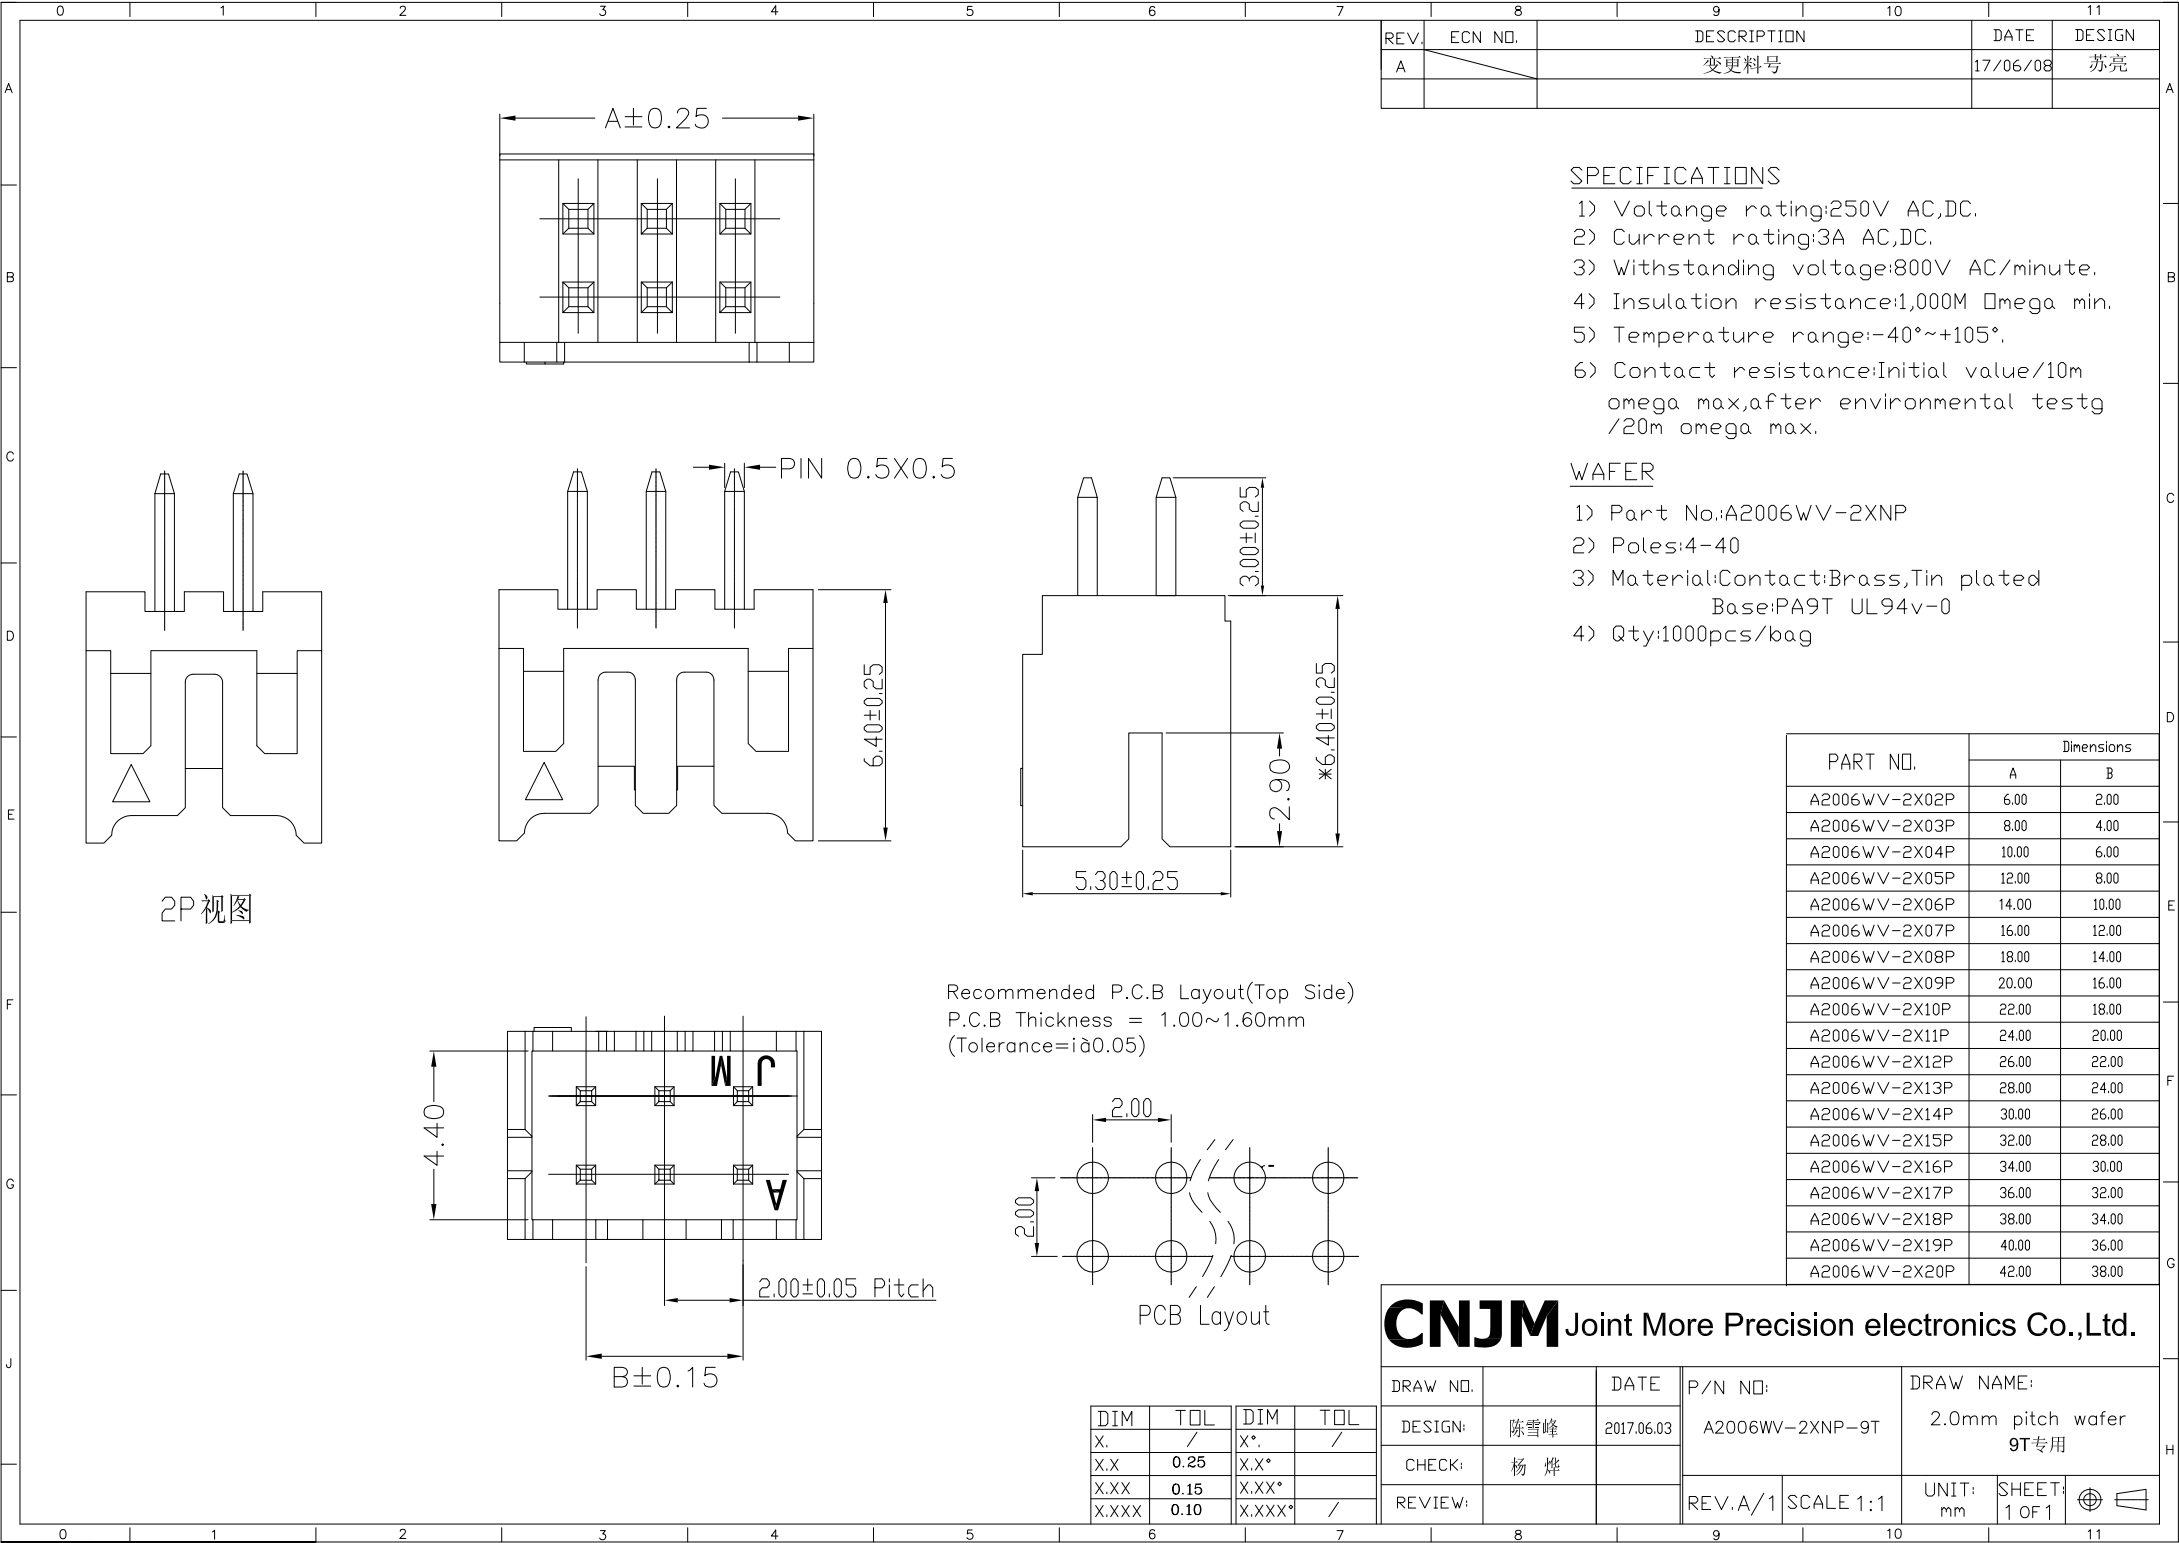

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
A		变更料号	17/06/08	苏亮

SPECIFICATIONS

- 1) Voltange rating:250V AC,DC.
- 2) Current rating:3A AC,DC.
- 3) Withstanding voltage:800V AC/minute.
- 4) Insulation resistance:1,000M Ω min.
- 5) Temperature range:-40°~+105°.
- 6) Contact resistance:Initial value/10m Ω max,after environmental testg /20m Ω max.



WAFER

- 1) Part No.:A2006WV-2XNP
- 2) Poles:4-40
- 3) Material:Contact:Brass,Tin plated
Base:PA9T UL94v-0
- 4) Qty:1000pcs/bag

PART NO.	Dimensions	
	A	B
A2006WV-2X02P	6.00	2.00
A2006WV-2X03P	8.00	4.00
A2006WV-2X04P	10.00	6.00
A2006WV-2X05P	12.00	8.00
A2006WV-2X06P	14.00	10.00
A2006WV-2X07P	16.00	12.00
A2006WV-2X08P	18.00	14.00
A2006WV-2X09P	20.00	16.00
A2006WV-2X10P	22.00	18.00
A2006WV-2X11P	24.00	20.00
A2006WV-2X12P	26.00	22.00
A2006WV-2X13P	28.00	24.00
A2006WV-2X14P	30.00	26.00
A2006WV-2X15P	32.00	28.00
A2006WV-2X16P	34.00	30.00
A2006WV-2X17P	36.00	32.00
A2006WV-2X18P	38.00	34.00
A2006WV-2X19P	40.00	36.00
A2006WV-2X20P	42.00	38.00




CNJMJoint More Precision electronics Co.,Ltd.					
DRAW NO.		DATE	P/N NO:	DRAW NAME:	
DESIGN:	陈雪峰	2017.06.03	A2006WV-2XNP-9T	2.0mm pitch wafer	
CHECK:	杨 烨			9T专用	
REVIEW:			REV.A/1	SCALE 1:1	UNIT: mm
					SHEET: 1 OF 1
					⊕

DIM	TOL	DIM	TOL
X.	/	X*.	/
X.X	0.25	X.X*	
X.XX	0.15	X.XX*	
X.XXX	0.10	X.XXX*	/

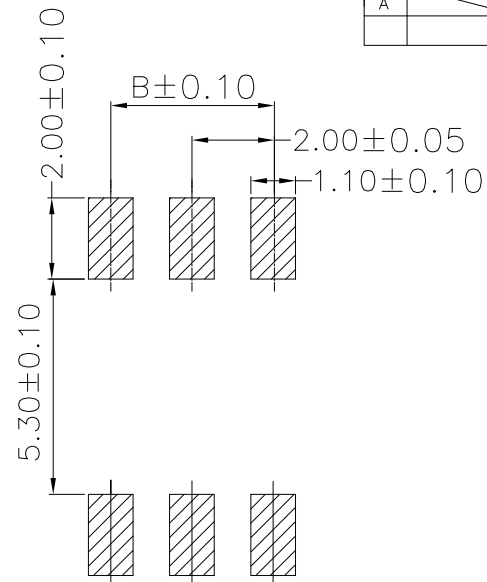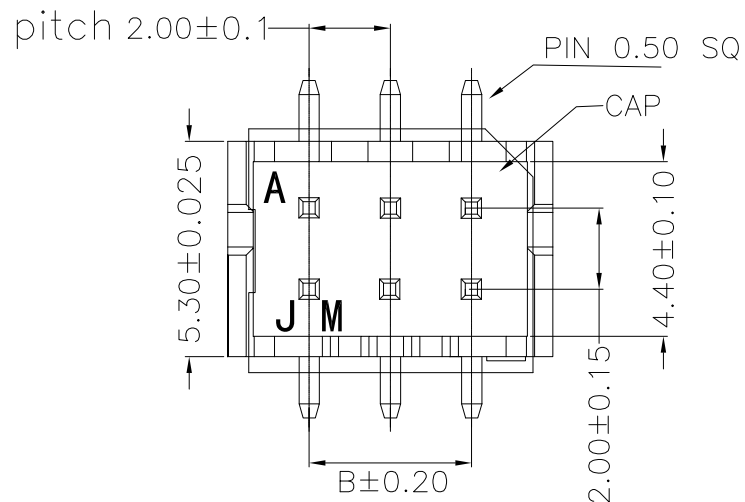

Specifications:
Current rating:3A AC/DC.
Voltage rating:250V AC/DC
Temperature range:-40°C~+105°C.
Contact resistance:10MΩ Max.
Insulation resistance:1000MΩ Min.
Withstanding voltage: 800V AC/minute.
PIN Material:Brass/Tin over Nickel.
Material:Pa9t 94v0 (Lvory) .

P.C.B LAYOUT

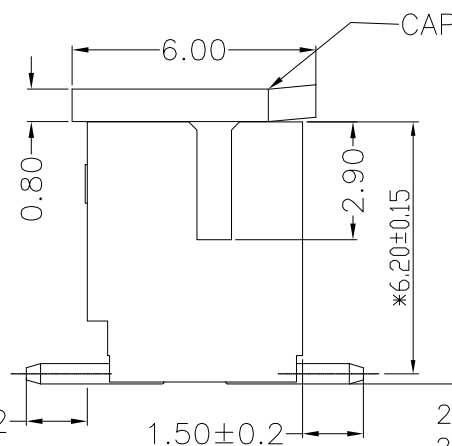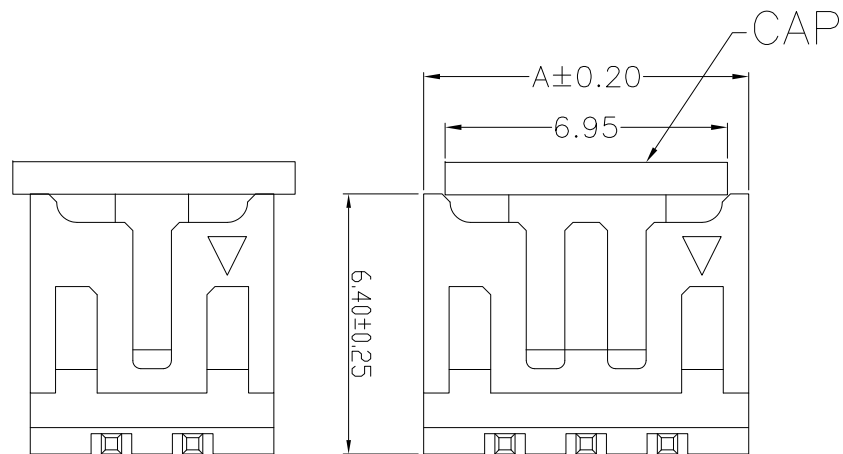

2X02P-2X10P 0.10mm
2X11P-2X20P 0.15mm


PART NO.	Dimensions	
	A	B
A2006WV-S-2X02P	6.00	2.00
A2006WV-S-2X03P	8.00	4.00
A2006WV-S-2X04P	10.00	6.00
A2006WV-S-2X05P	12.00	8.00
A2006WV-S-2X06P	14.00	10.00
A2006WV-S-2X07P	16.00	12.00
A2006WV-S-2X08P	18.00	14.00
A2006WV-S-2X09P	20.00	16.00
A2006WV-S-2X10P	22.00	18.00
A2006WV-S-2X11P	24.00	20.00
A2006WV-S-2X12P	26.00	22.00
A2006WV-S-2X13P	28.00	24.00
A2006WV-S-2X14P	30.00	26.00
A2006WV-S-2X15P	32.00	28.00
A2006WV-S-2X16P	34.00	30.00
A2006WV-S-2X17P	36.00	32.00
A2006WV-S-2X18P	38.00	34.00
A2006WV-S-2X19P	40.00	36.00
A2006WV-S-2X20P	42.00	38.00

2P 视图

CNJM Joint More Precision electronics Co.,Ltd.

DIM	TOL	DIM	TOL
X.	/	X*.	/
X.X	0.25	X.X*	
X.XX	0.15	X.XX*	
X.XXX	0.10	X.XXX*	/

DRAW NO.		DATE	P/N NO:	DRAW NAME:
DESIGN:	陈雪峰	2017.06.03	A2006WV-S-2XNP	2.0mm PITCH 180° DUAL ROW WAFER -SMT YTYPE
CHECK:	杨 烨		REV.A/1	SCALE 1:1
REVIEW:			UNIT: mm	SHEET: 1 OF 1

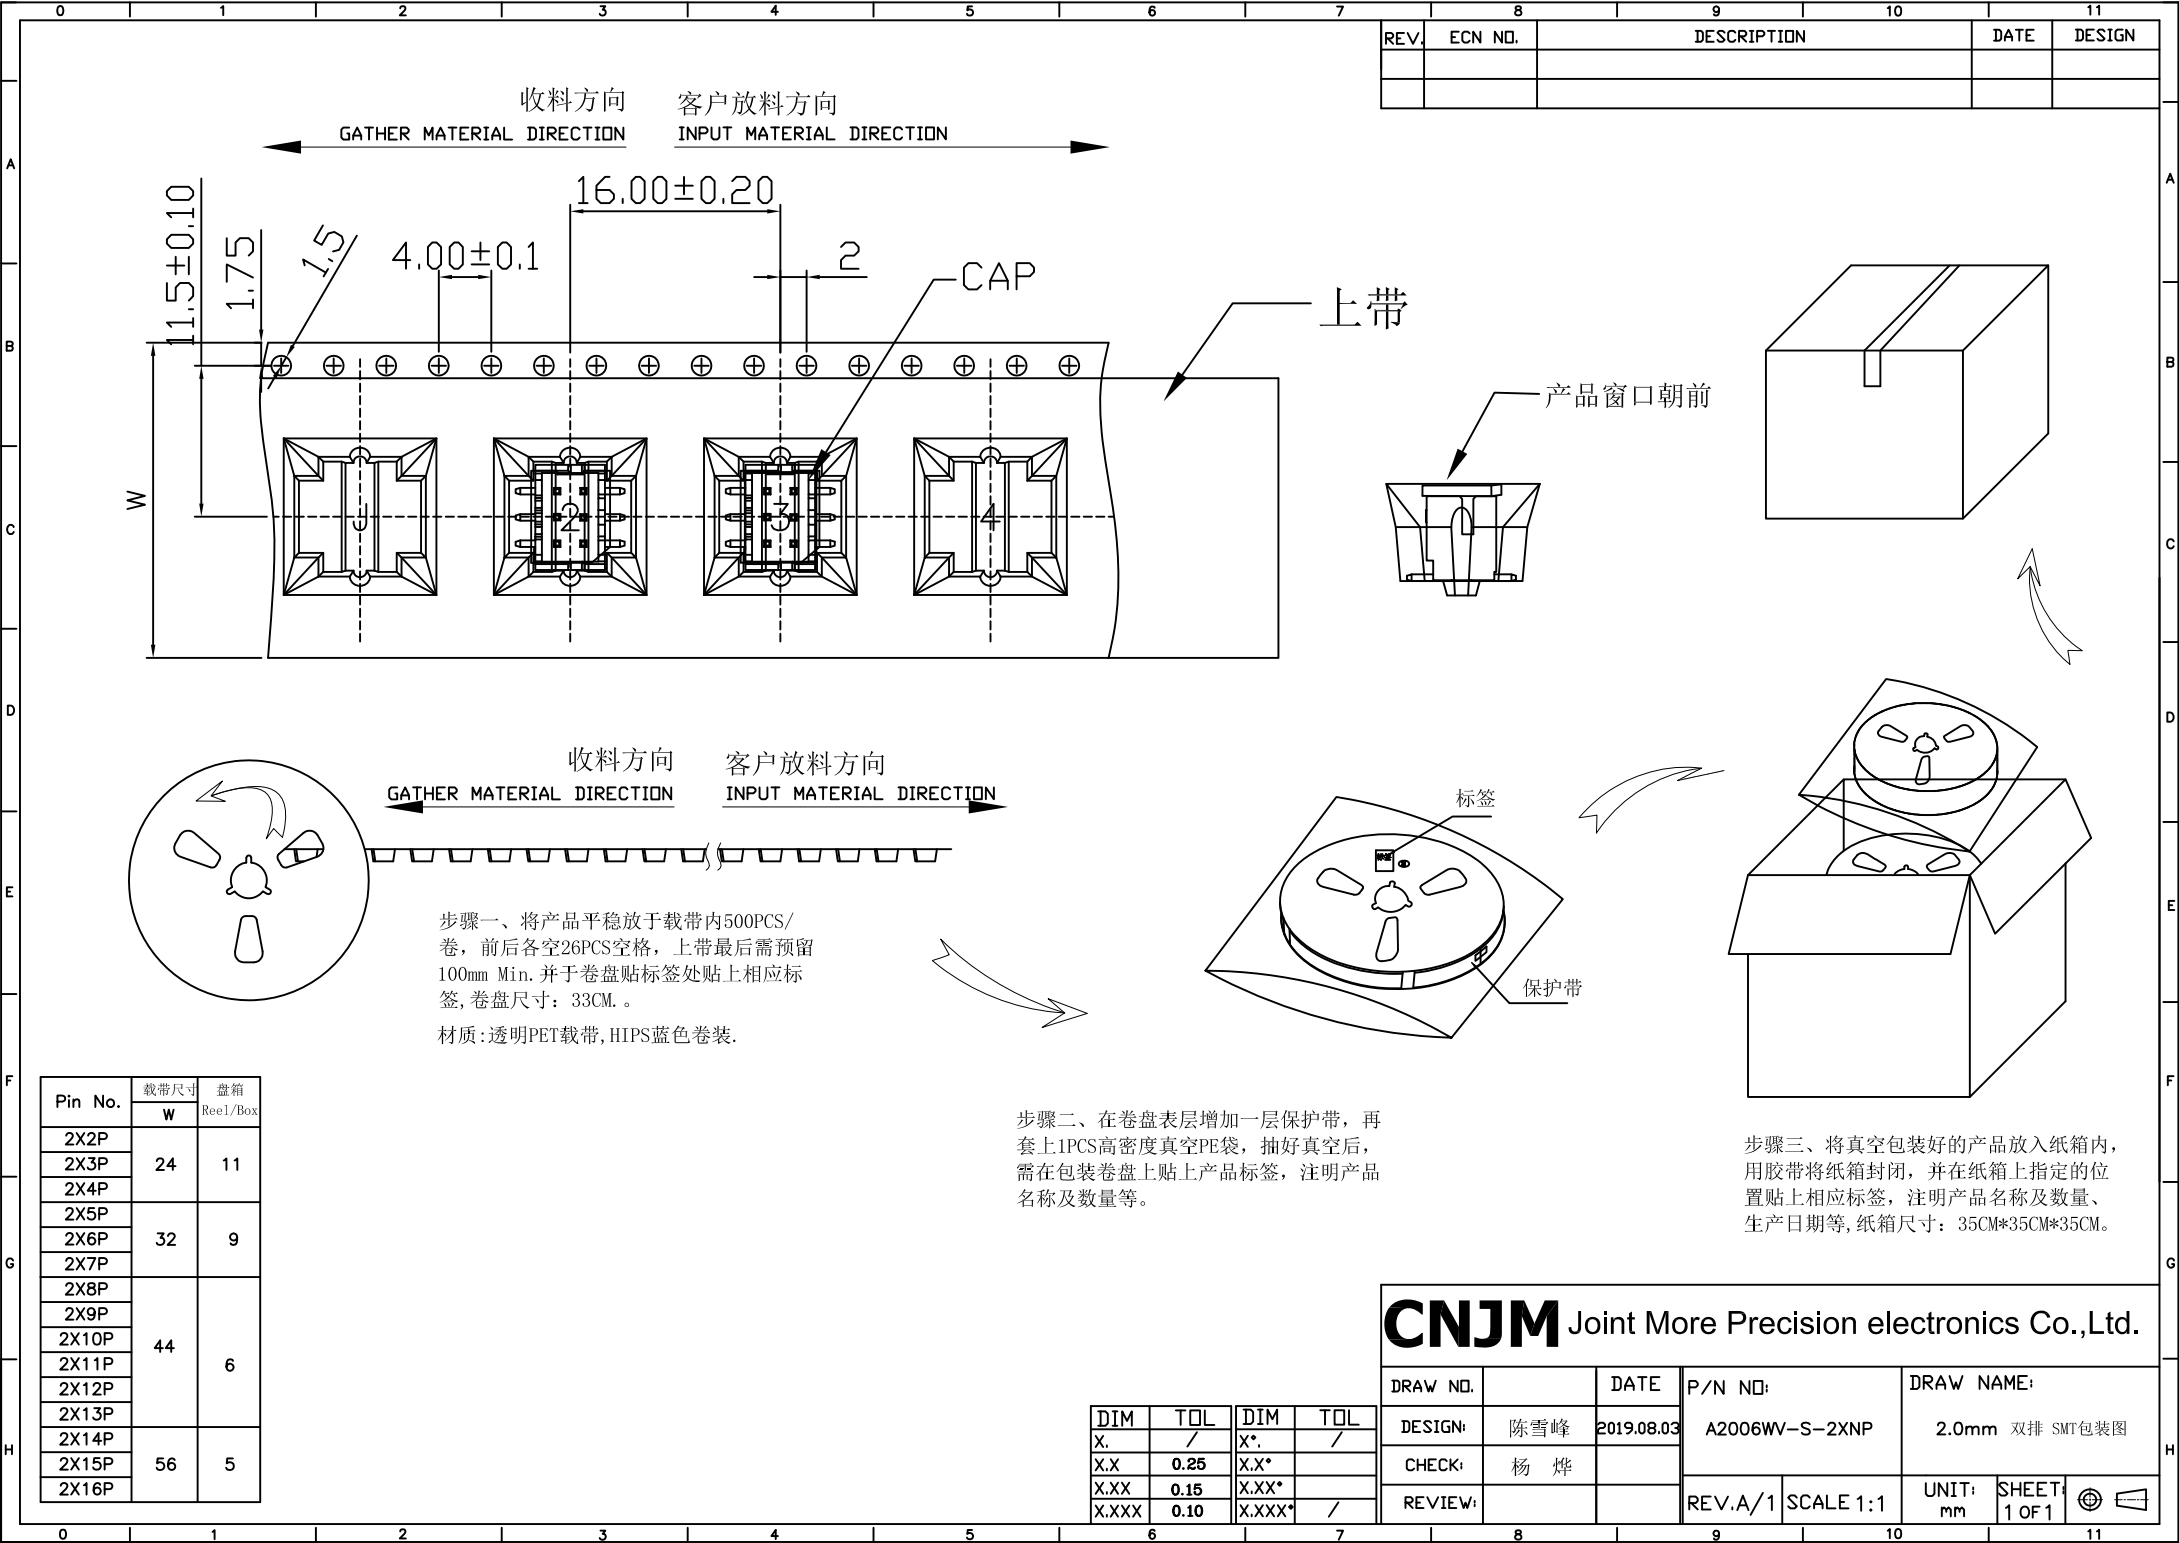

REV	ECN NO.	DESCRIPTION	DATE	DESIGN

Pin No.	载带尺寸	盘箱
	W	Reel/Box
2X2P	24	11
2X3P		
2X4P		
2X5P		
2X6P	32	9
2X7P		
2X8P		
2X9P		
2X10P	44	6
2X11P		
2X12P		
2X13P		
2X14P	56	5
2X15P		
2X16P		

DIM	TOL	DIM	TOL
X.	/	X*.	/
X.X	0.25	X.X*	
X.XX	0.15	X.XX*	
X.XXX	0.10	X.XXX*	/

CNJM Joint More Precision electronics Co.,Ltd.							
DRAW NO.		DATE	P/N NO:	DRAW NAME:			
DESIGN:	陈雪峰	2019.08.03	A2006WV-S-2XNP	2.0mm 双排 SMT包装图			
CHECK:	杨 烨						
REVIEW:			REV.A/1	SCALE 1:1	UNIT: mm	SHEET: 1 OF 1	


REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

Specifications:
Current rating:3A AC/DC.
Voltage rating:250V AC/DC
Temperature range:-25°C~+85°C.
Contact resistance:10mΩ Max.
Insulation resistance:1000MΩ Min.
Withstanding voltage: 1000V AC/minute.
Material:PA66.UL94V-0(White).

PART NO.	Dimensions		
	A	B	C
A2006HU-2x04P	6.00	10.00	8.65
A2006HU-2x05P	8.00	12.00	10.65
A2006HU-2x06P	10.00	14.00	12.65
A2006HU-2x07P	12.00	16.00	14.65
A2006HU-2x08P	14.00	18.00	16.65
A2006HU-2x09P	16.00	20.00	18.65
A2006HU-2x10P	18.00	22.00	20.65
A2006HU-2x11P	20.00	24.00	22.65
A2006HU-2x12P	22.00	26.00	24.65
A2006HU-2x13P	24.00	28.00	26.65
A2006HU-2x14P	26.00	30.00	28.65
A2006HU-2x15P	28.00	32.00	30.65
A2006HU-2x16P	30.00	34.00	32.65
A2006HU-2x17P	32.00	36.00	34.65
A2006HU-2x18P	34.00	38.00	36.65
A2006HU-2x19P	36.00	40.00	38.65
A2006HU-2x20P	38.00	42.00	40.65

CNJM Joint More Precision electronics Co.,Ltd.					
DRAW NO.		DATE	P/N NO:	DRAW NAME:	
DESIGN:	陈雪峰	2018.03.29	A2006HU-2xNP	2.00mm pitch Housing	
CHECK:	杨 烨				
REVIEW:			REV. A/1	SCALE 4:1	UNIT: mm
			SHEET: 1 OF 1		

DIM	TOL	DIM	TOL
X.	/	X°.	/
X.X	0.35	X.X°	
X.XX	0.25	X.XX°	
X.XXX	0.15	X.XXX°	/

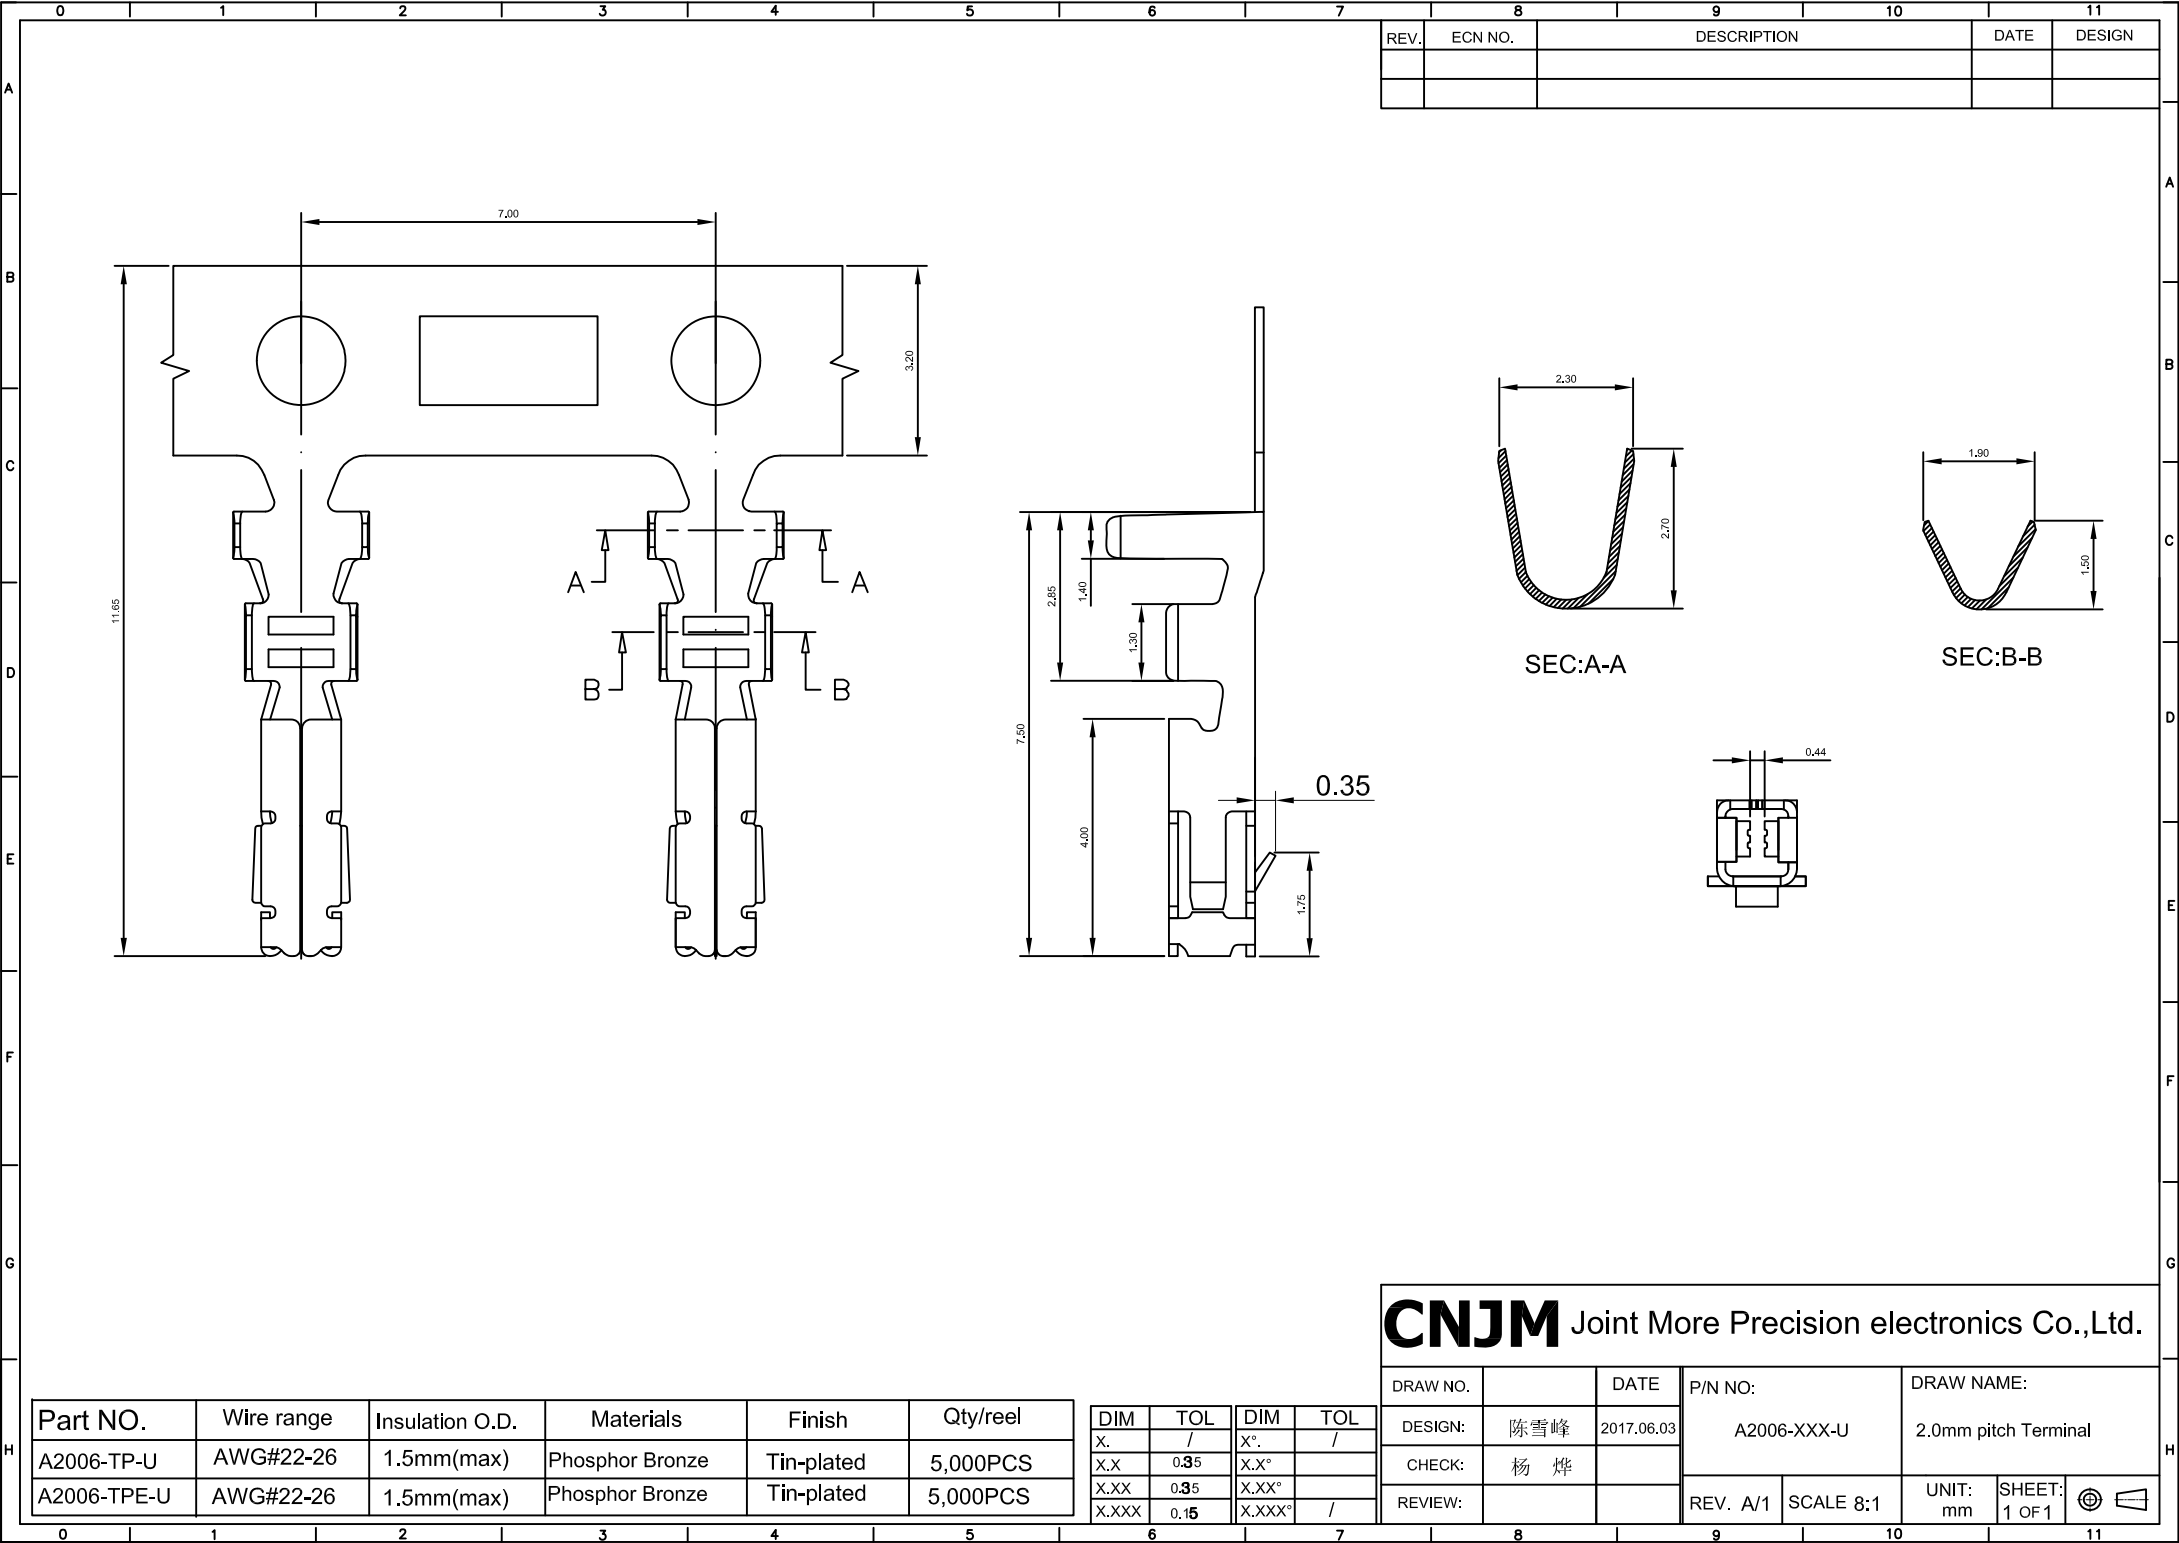


REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

Part NO.	Wire range	Insulation O.D.	Materials	Finish	Qty/reel
A2006-TP-U	AWG#22-26	1.5mm(max)	Phosphor Bronze	Tin-plated	5,000PCS
A2006-TPE-U	AWG#22-26	1.5mm(max)	Phosphor Bronze	Tin-plated	5,000PCS


DIM	TOL	DIM	TOL
X.	/	X°.	/
X.X	0.35	X.X°	
X.XX	0.35	X.XX°	
X.XXX	0.15	X.XXX°	/

CNJM Joint More Precision electronics Co.,Ltd.							
DRAW NO.		DATE	P/N NO:		DRAW NAME:		
DESIGN:		陈雪峰	2017.06.03		A2006-XXX-U		2.0mm pitch Terminal
CHECK:		杨 烨					
REVIEW:					REV. A/1	SCALE 8:1	UNIT: mm
							SHEET: 1 OF 1
							⊙

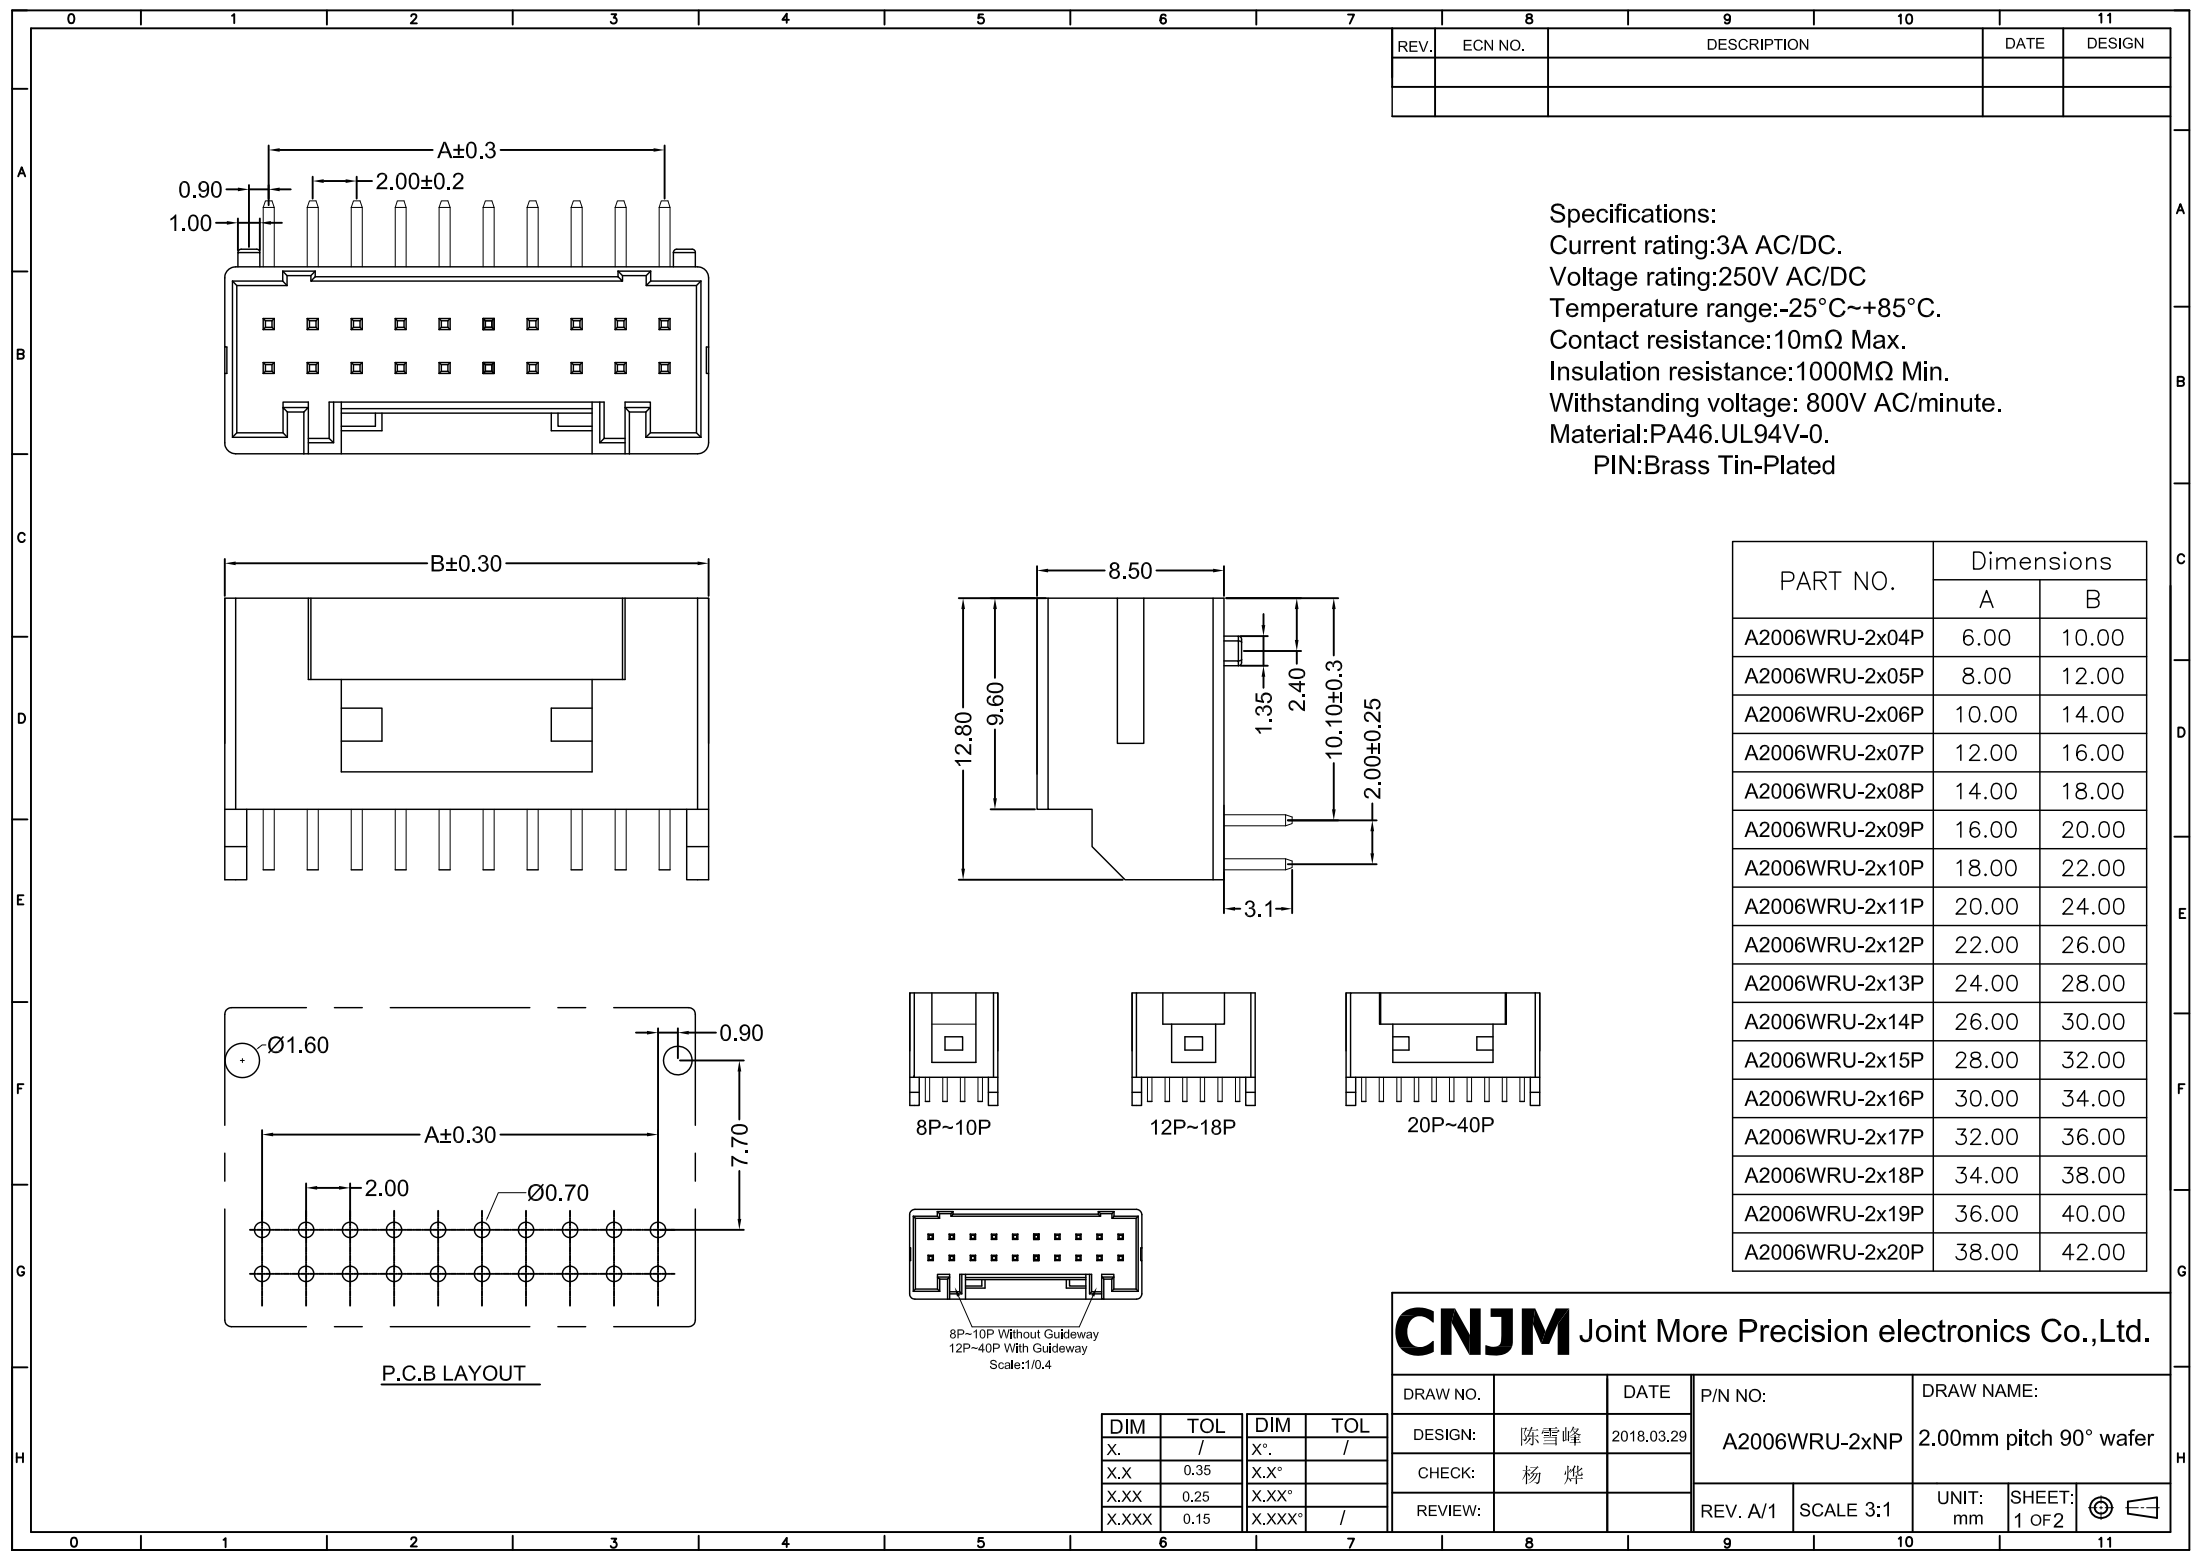

CNJM Joint More Precision electronics Co.,Ltd.

DRAW NO.		DATE	P/N NO:	DRAW NAME:
DESIGN:	陈雪峰	2018.03.29	A2006WRU-2xNP	2.00mm pitch 90° wafer
CHECK:	杨 烨			
REVIEW:			REV. A/1	SCALE 3:1
			UNIT: mm	SHEET: 1 OF 2

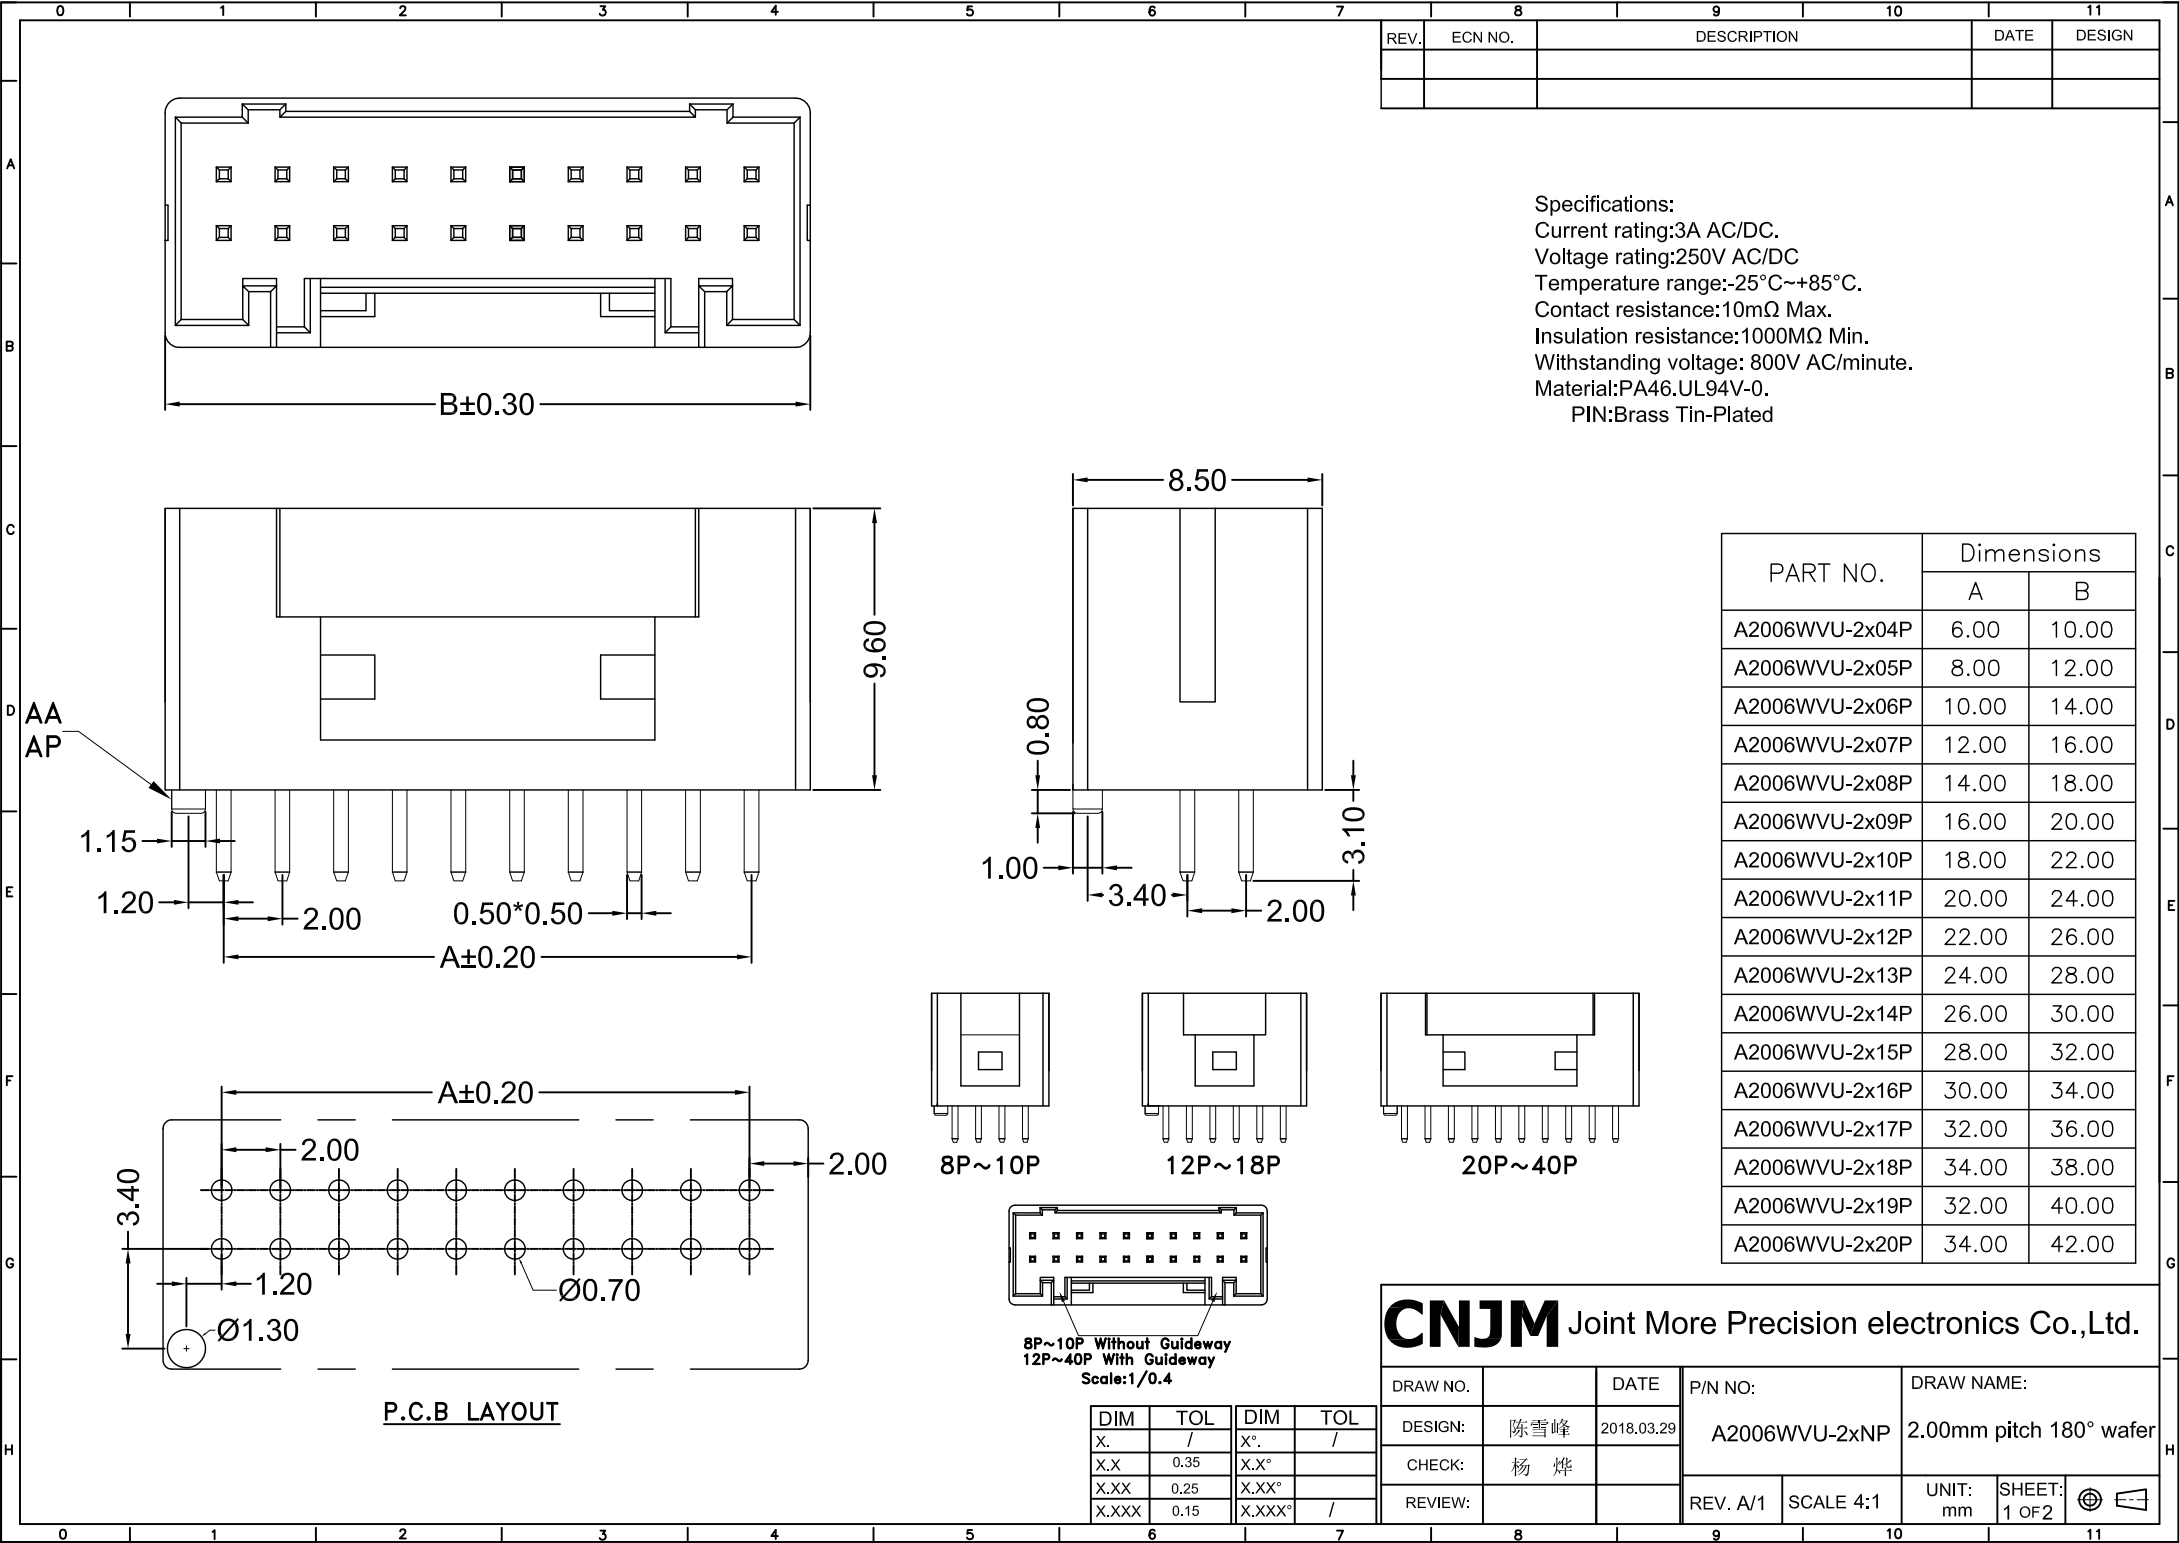

Specifications:
Current rating:3A AC/DC.
Voltage rating:250V AC/DC
Temperature range:-25°C~+85°C.
Contact resistance:10mΩ Max.
Insulation resistance:1000MΩ Min.
Withstanding voltage: 800V AC/minute.
Material:PA46.UL94V-0.
PIN:Brass Tin-Plated

PART NO.	Dimensions	
	A	B
A2006WVU-2x04P	6.00	10.00
A2006WVU-2x05P	8.00	12.00
A2006WVU-2x06P	10.00	14.00
A2006WVU-2x07P	12.00	16.00
A2006WVU-2x08P	14.00	18.00
A2006WVU-2x09P	16.00	20.00
A2006WVU-2x10P	18.00	22.00
A2006WVU-2x11P	20.00	24.00
A2006WVU-2x12P	22.00	26.00
A2006WVU-2x13P	24.00	28.00
A2006WVU-2x14P	26.00	30.00
A2006WVU-2x15P	28.00	32.00
A2006WVU-2x16P	30.00	34.00
A2006WVU-2x17P	32.00	36.00
A2006WVU-2x18P	34.00	38.00
A2006WVU-2x19P	32.00	40.00
A2006WVU-2x20P	34.00	42.00


CNJM

Joint More Precision electronics Co.,Ltd.

DRAW NO.		DATE	P/N NO:	DRAW NAME:	
DESIGN:	陈雪峰	2018.03.29	A2006WVU-2xNP	2.00mm pitch 180° wafer	
CHECK:	杨 烨				
REVIEW:			REV. A/1	SCALE 4:1	UNIT: mm

SHEET: 1 of 2


DIM	TOL	DIM	TOL
X.	/	X°.	/
X.X	0.35	X.X°	
X.XX	0.25	X.XX°	
X.XXX	0.15	X.XXX°	/

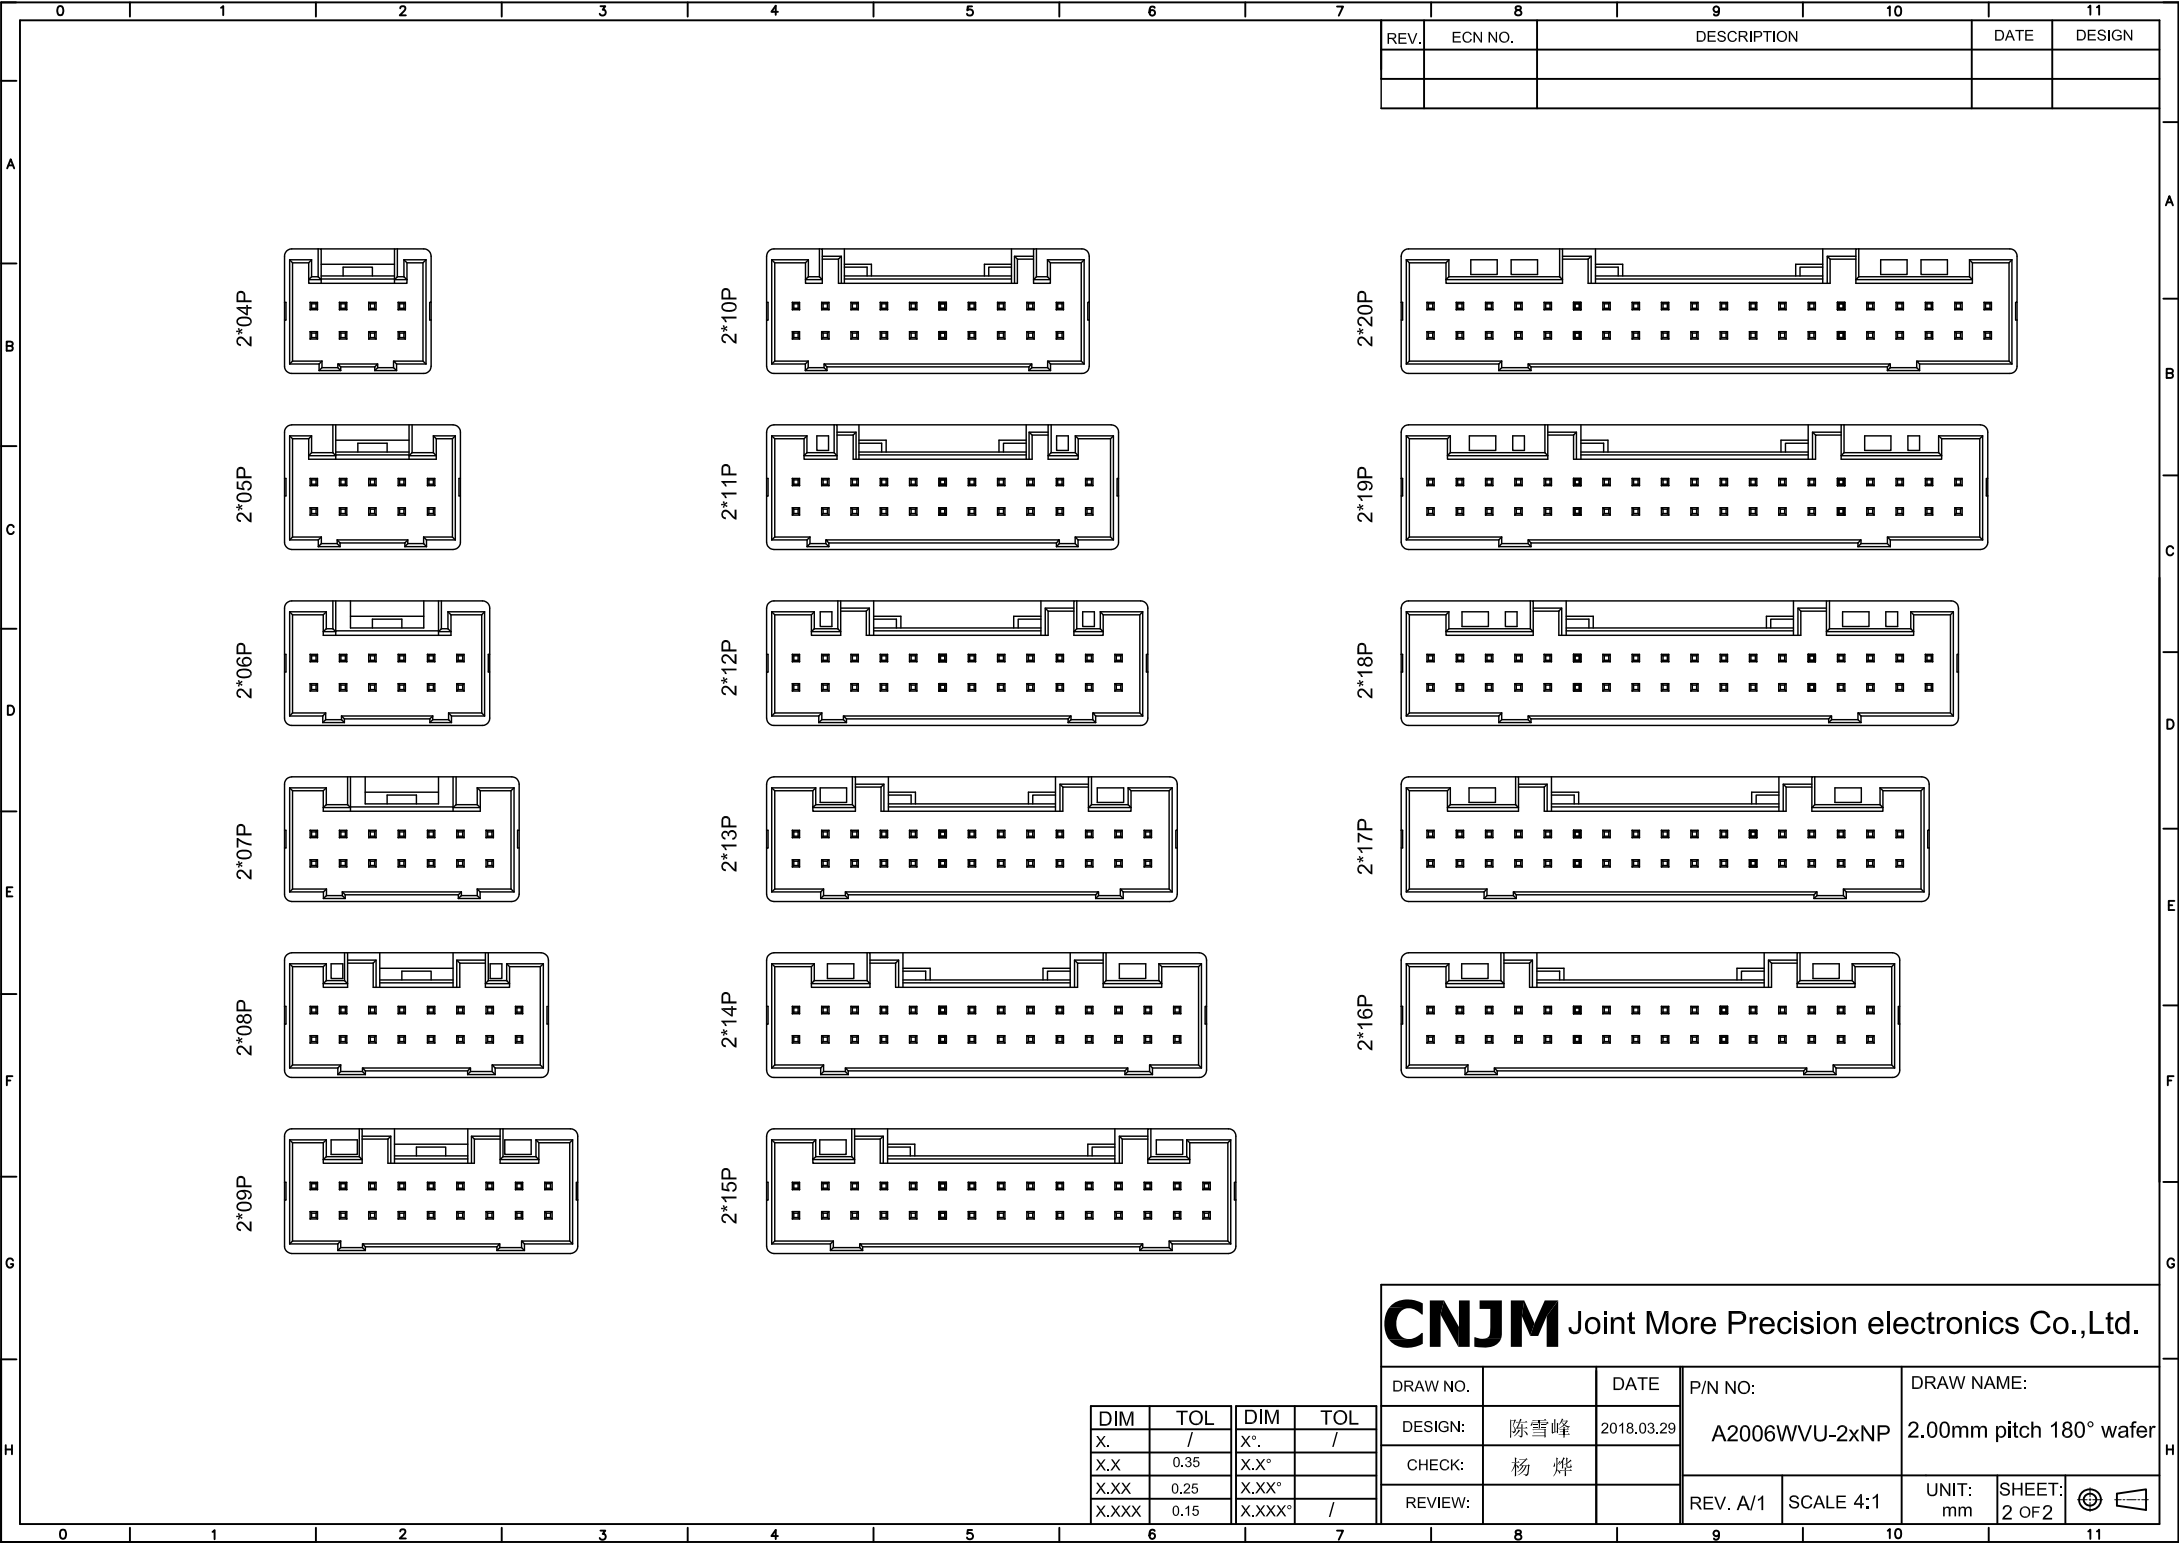






REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

CNJM Joint More Precision electronics Co.,Ltd.				
DRAW NO.		DATE	P/N NO:	DRAW NAME:
DESIGN:	陈雪峰	2018.03.29	A2006WVU-2xNP	2.00mm pitch 180° wafer
CHECK:	杨 烨		REV. A/1	SCALE 4:1
REVIEW:			UNIT: mm	SHEET: 2 OF 2

DIM	TOL	DIM	TOL
X.	/	X°.	/
X.X	0.35	X.X°	
X.XX	0.25	X.XX°	
X.XXX	0.15	X.XXX°	/

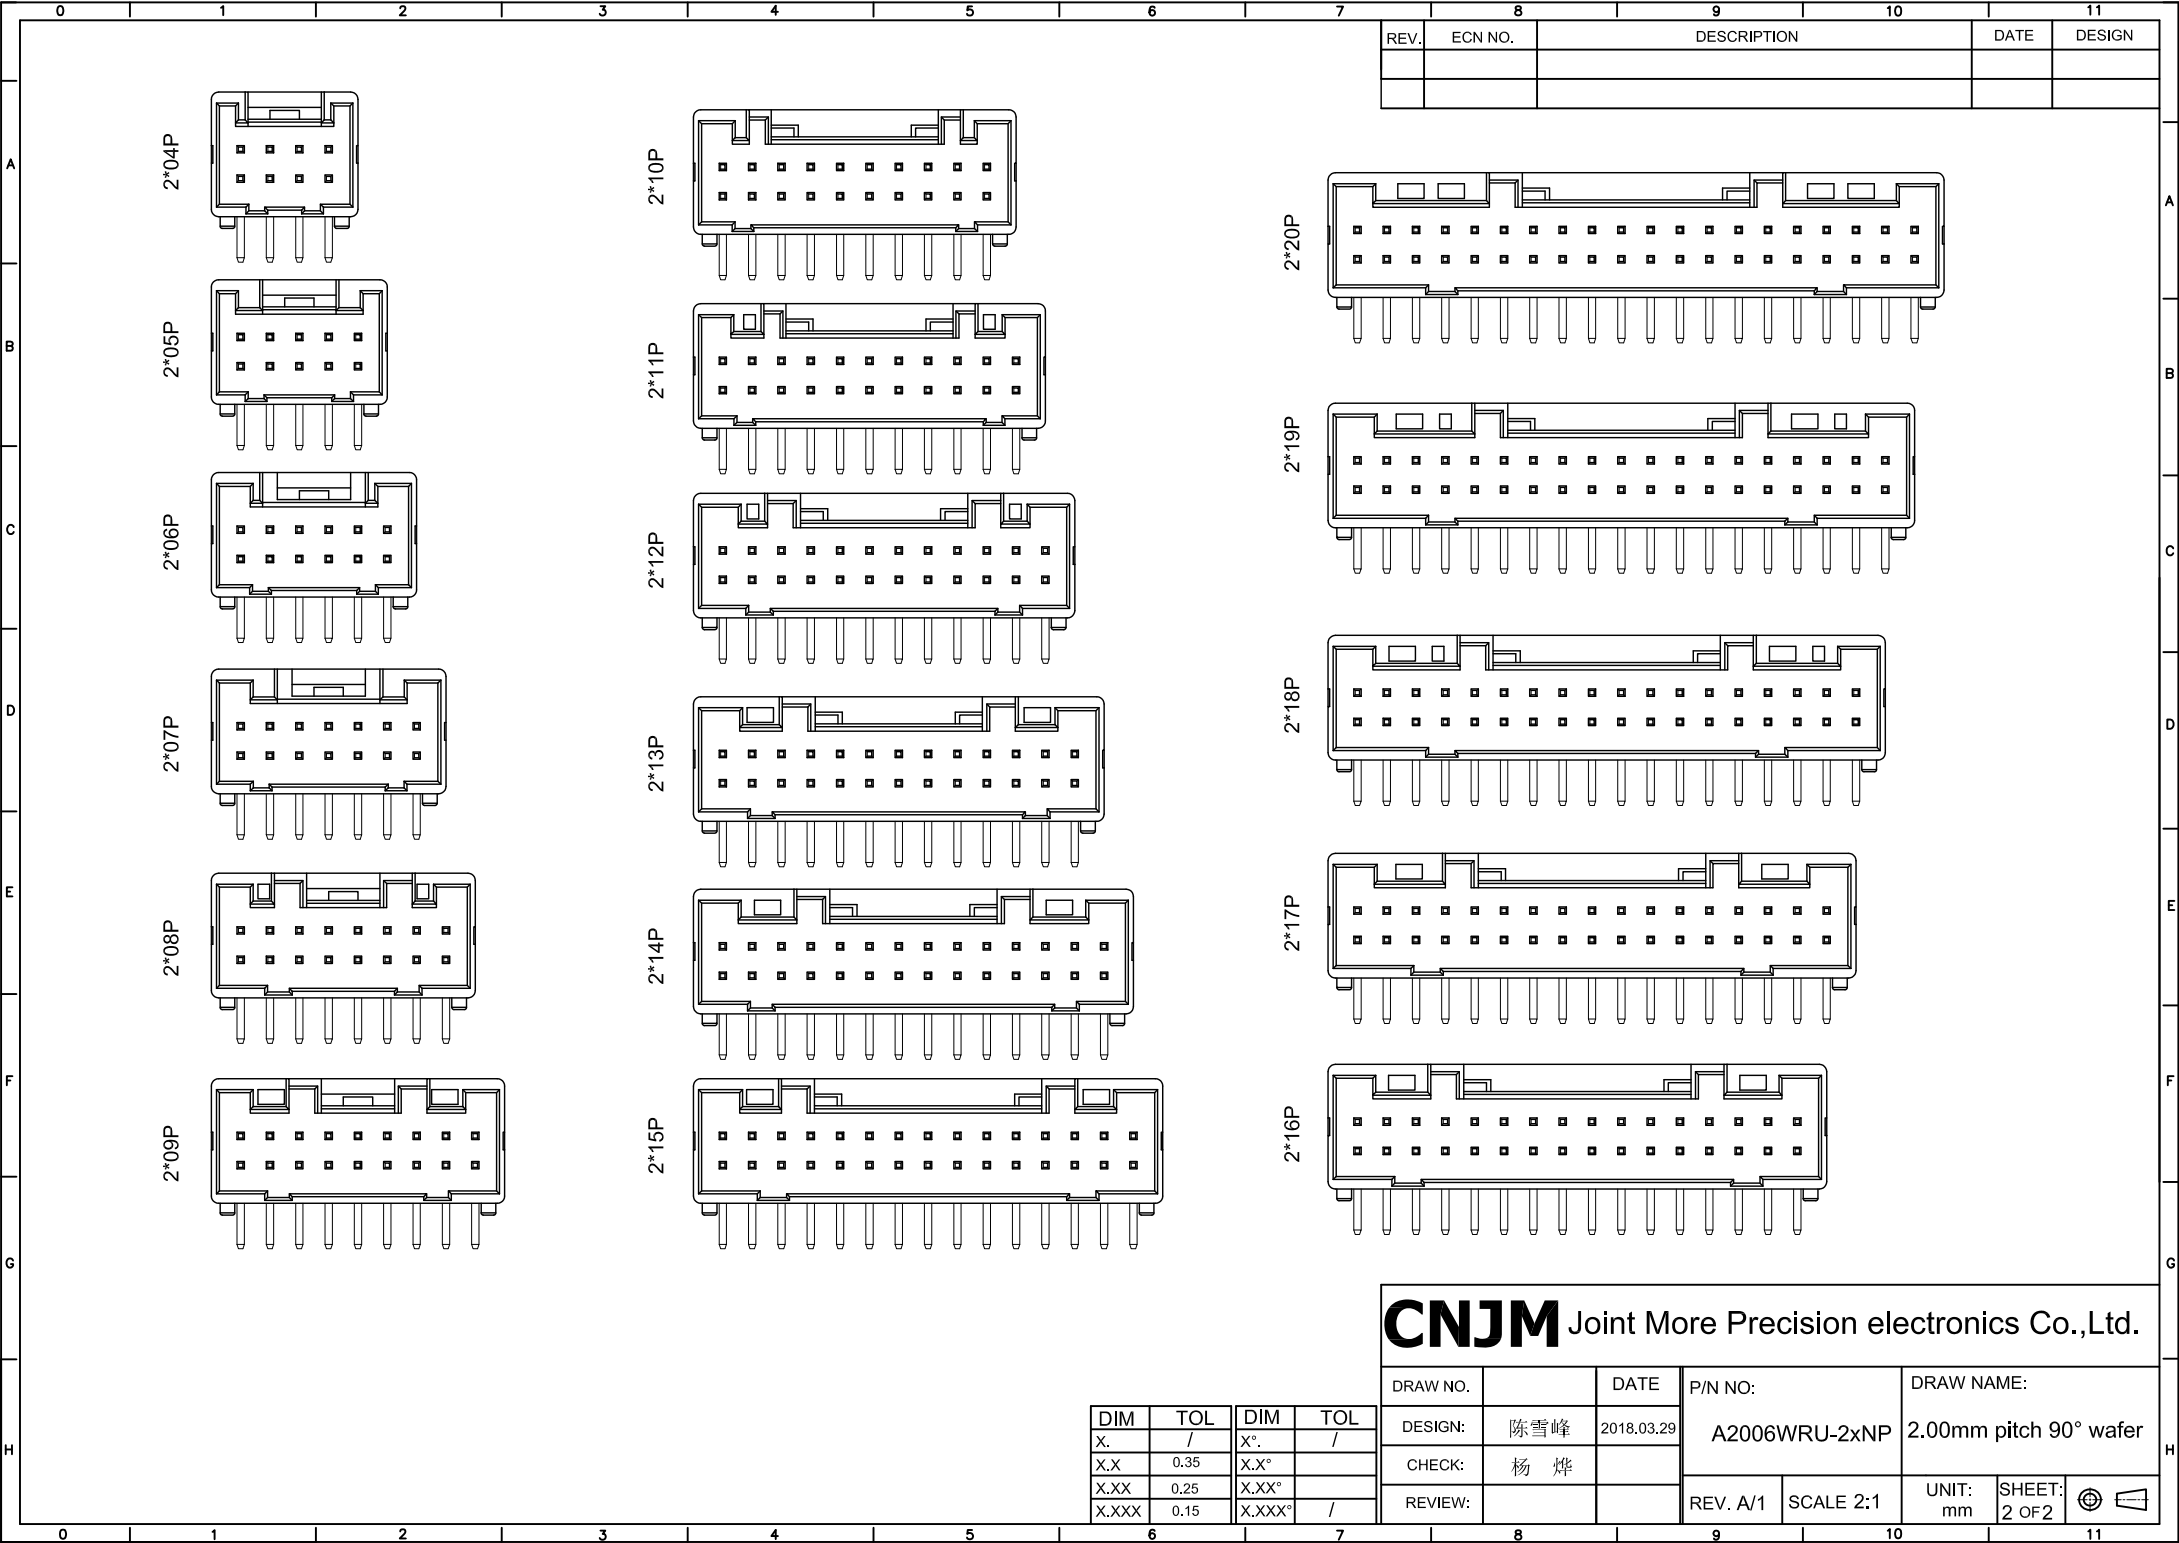


7	8	9	10	11
REV.	ECN NO.	DESCRIPTION		DATE

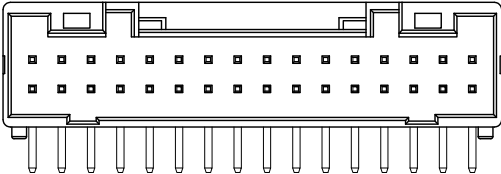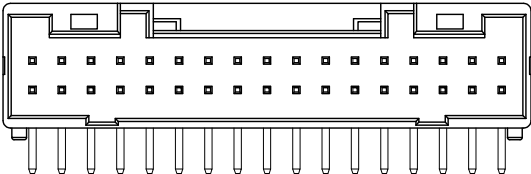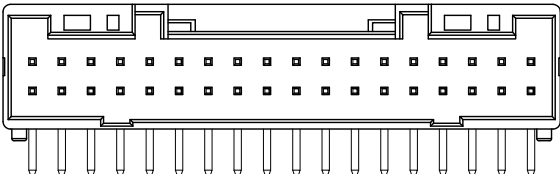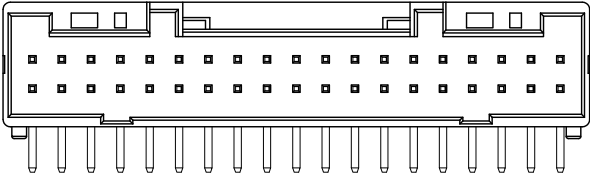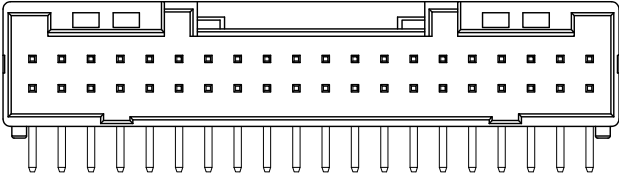



CNJM Joint More Precision electronics Co.,Ltd.					
DRAW NO.		DATE	P/N NO:	DRAW NAME:	
DESIGN:	陈雪峰	2018.03.29	A2006WRU-2xNP	2.00mm pitch 90° wafer	
CHECK:	杨 烨				
REVIEW:			REV. A/1	SCALE 2:1	UNIT: mm
				SHEET: 2 OF 2	

DIM	TOL	DIM	TOL
X.	/	X°.	/
X.X	0.35	X.X°	
X.XX	0.25	X.XX°	
X.XXX	0.15	X.XXX°	/

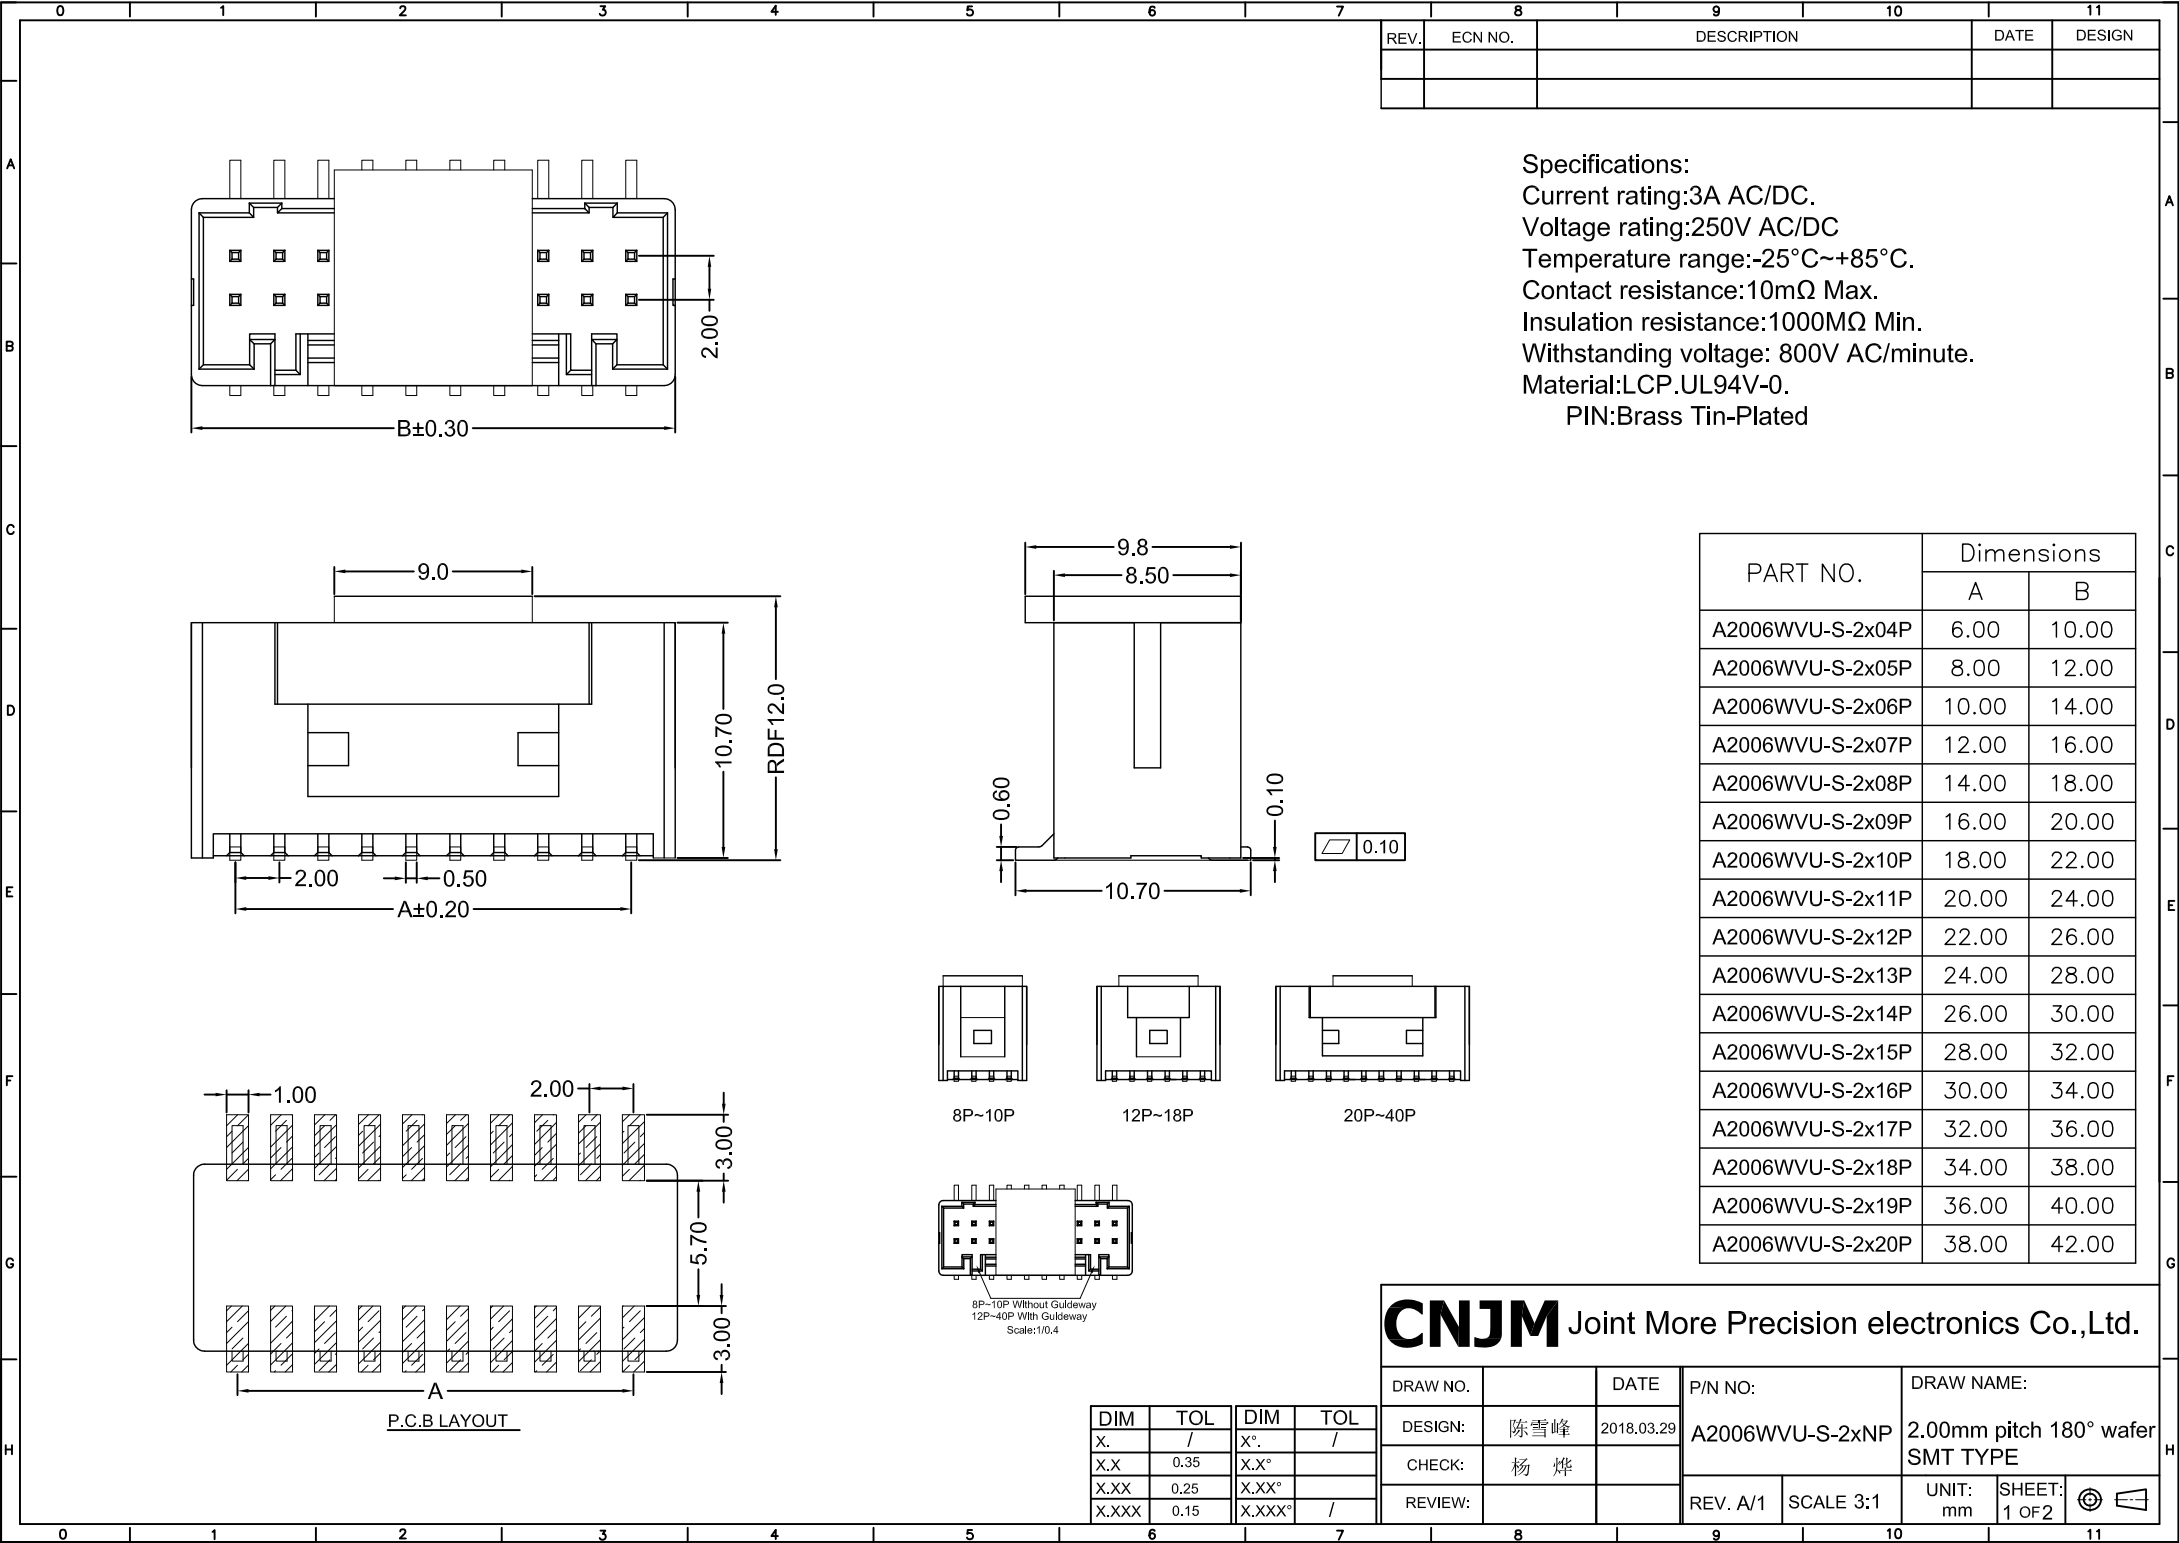


Specifications:
Current rating:3A AC/DC.
Voltage rating:250V AC/DC
Temperature range:-25°C~+85°C.
Contact resistance:10mΩ Max.
Insulation resistance:1000MΩ Min.
Withstanding voltage: 800V AC/minute.
Material:LCP.UL94V-0.
PIN:Brass Tin-Plated

PART NO.	Dimensions	
	A	B
A2006WVU-S-2x04P	6.00	10.00
A2006WVU-S-2x05P	8.00	12.00
A2006WVU-S-2x06P	10.00	14.00
A2006WVU-S-2x07P	12.00	16.00
A2006WVU-S-2x08P	14.00	18.00
A2006WVU-S-2x09P	16.00	20.00
A2006WVU-S-2x10P	18.00	22.00
A2006WVU-S-2x11P	20.00	24.00
A2006WVU-S-2x12P	22.00	26.00
A2006WVU-S-2x13P	24.00	28.00
A2006WVU-S-2x14P	26.00	30.00
A2006WVU-S-2x15P	28.00	32.00
A2006WVU-S-2x16P	30.00	34.00
A2006WVU-S-2x17P	32.00	36.00
A2006WVU-S-2x18P	34.00	38.00
A2006WVU-S-2x19P	36.00	40.00
A2006WVU-S-2x20P	38.00	42.00

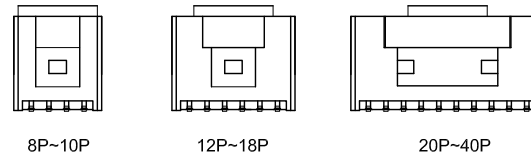

DIM	TOL	DIM	TOL
X.	/	X°.	/
X.X	0.35	X.X°	
X.XX	0.25	X.XX°	
X.XXX	0.15	X.XXX°	/

CNJM Joint More Precision electronics Co.,Ltd.			
DRAW NO.		DATE	
DESIGN:	陈雪峰	2018.03.29	
CHECK:	杨 烨		
REVIEW:			
P/N NO:	A2006WVU-S-2xNP	DRAW NAME:	2.00mm pitch 180° wafer SMT TYPE
REV. A/1	SCALE 3:1	UNIT: mm	SHEET: 1 OF 2

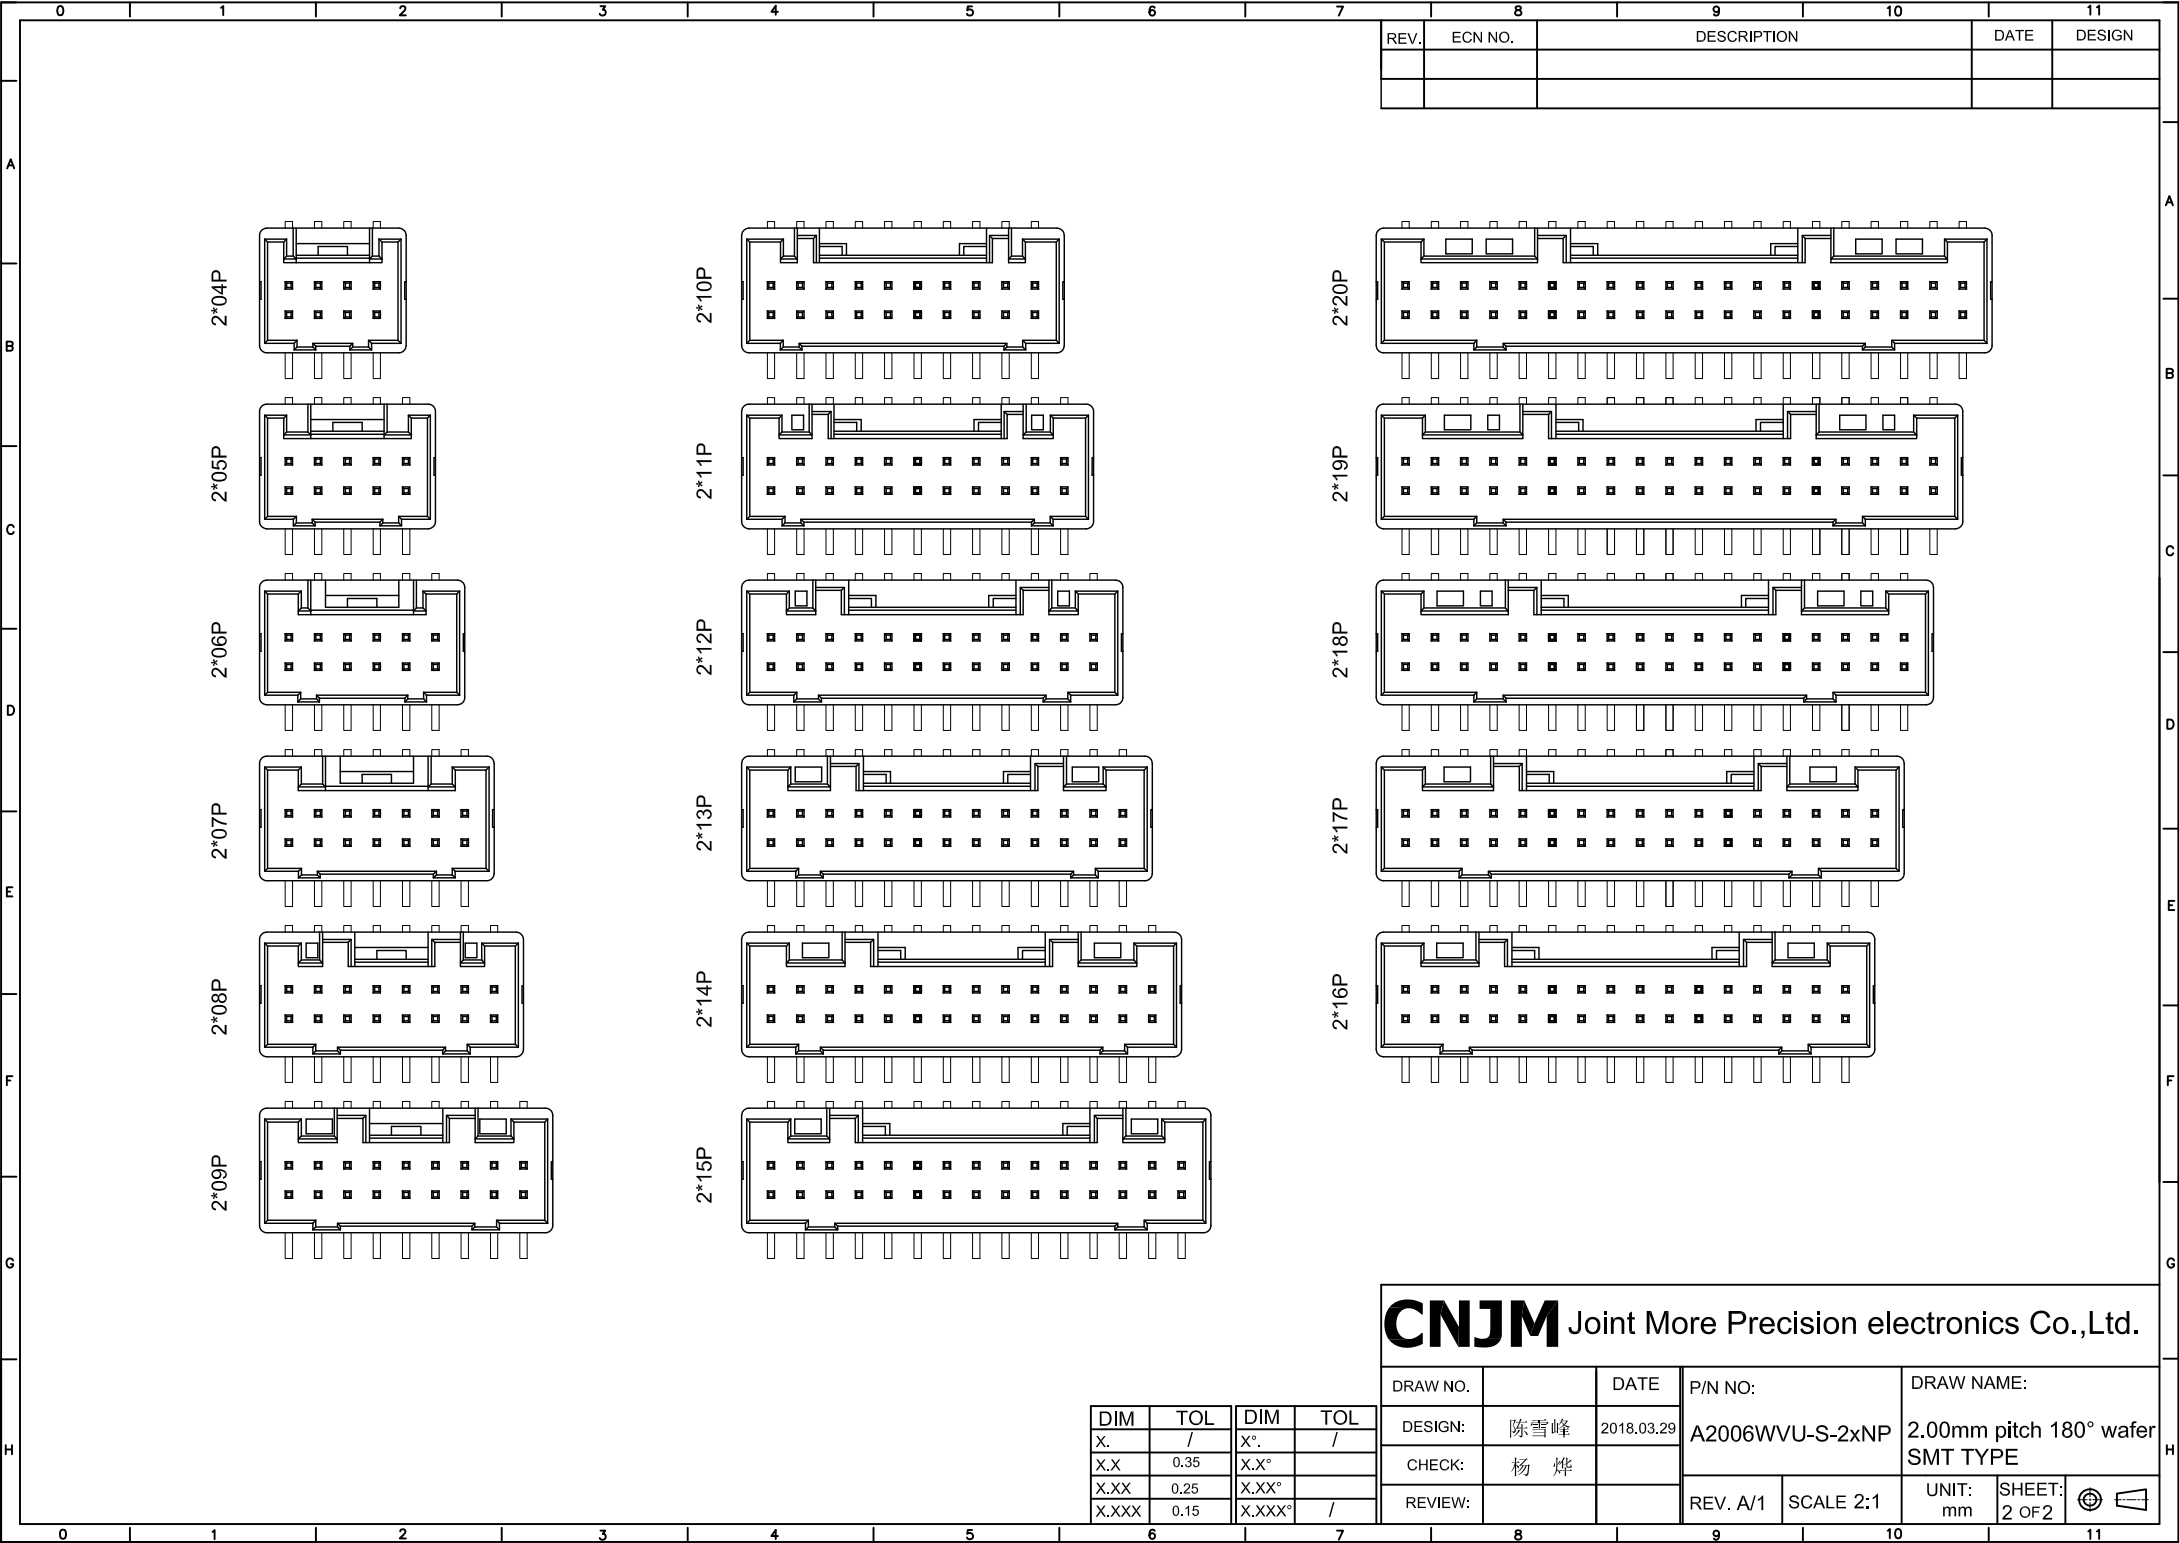

CNJM Joint More Precision electronics Co.,Ltd.

DRAW NO.		DATE	P/N NO:	DRAW NAME:		
DESIGN:	陈雪峰	2018.03.29	A2006WVU-S-2xNP		2.00mm pitch 180° wafer	
CHECK:	杨 焯				SMT TYPE	
REVIEW:			REV. A/1	SCALE 2:1	UNIT: mm	SHEET: 2 OF 2

DIM	TOL	DIM	TOL
X.	/	X°.	/
X.X	0.35	X.X°	
X.XX	0.25	X.XX°	
X.XXX	0.15	X.XXX°	/